

PromateX | Lighting range
LR

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-20BT01	● 20W	2000-2080LM	N	114x90x29mm
LPFL-30BT01	● 30W	3000-3080LM	N	136X118X29mm
LPFL-50BT01	● 50W	5000-5080LM	N	175X152X29mm
LPFL-100BT01	● 100W	10000-10500LM	N	236x202x32mm
LPFL-200BT01	● 200W	20000-20500LM	N	301X251X35mm
LPFL-300BT01	● 300W	30000-30500LM	N	330x302x35mm



All products are made in Germany

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-20BT02	● 20W	2000-2080LM	N	114x90x29mm
LPFL-30BT02	● 30W	3000-3080LM	N	136X118X29mm
LPFL-50BT02	● 50W	5000-5080LM	N	175X152X29mm
LPFL-100BT02	● 100W	10000-10500LM	N	236x202x32mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-200BT02	● 200W	20000-20500LM	N	301X251X35mm
LPFL-300BT02	● 300W	30000-30500LM	N	330x302x35mm
LPFL-400BT02	● 400W	40000-40500LM	N	485x385x66mm
LPFL-500BT02	● 500W	50000-50500LM	N	485x385x66mm

Material

High Quality Aviation Aluminum

Color Temperature




LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-50BF01	● 50W	4000-4050LM	N	140X160X46mm
LPFL-100BF01	● 80W	6400-6480LM	N	220X202X51mm
LPFL-50BF01-CCT	● 50W	4000-4050LM	N	140X160X46mm
LPFL-100BF01-CCT	● 80W	6400-6480LM	N	220X202X51mm

Color Temperature



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BS01	● 10W	1000-1080LM	N	117X31X107mm
LPFL-20BS01	● 20W	2000-2080LM	N	117X31X107mm
LPFL-30BS01	● 30W	3000-3080LM	N	156X144X33mm
LPFL-50BS01	● 50W	5000-5080LM	N	199X36X160mm
LPFL-70BS01	● 70W	7000-7080LM	N	255X50X240mm
LPFL-100BS01	● 100W	10000-10500LM	N	331X50X280mm
LPFL-150BS01	● 150W	15000-15500LM	N	331X62X280mm
LPFL-200BS01	● 200W	20000-20500LM	N	331X88X280mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BS01-G	● 10W	1000-1080LM	N	167X55X107mm
LPFL-20BS01-G	● 20W	2000-2080LM	N	167X55X107mm
LPFL-30BS01-G	● 30W	3000-3080LM	N	202X56X156mm
LPFL-50BS01-G	● 50W	5000-5080LM	N	225X60X198mm

Color Temperature



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10XT01	● 10W	1000-1080LM	N	105X30X100mm
LPFL-20XT01	● 20W	2000-2080LM	N	124X30X114mm
LPFL-30XT01	● 30W	3000-3080LM	N	154X32X138mm
LPFL-50XT01	● 50W	5000-5080LM	N	205X32X175mm





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-100XT01	● 100W	10000-10500LM	N	280X34X258mm
LPFL-150XT01	● 150W	15000-15500LM	N	320X38X280mm

Material

High Quality Aviation Aluminum


Color Temperature



IP66



200W

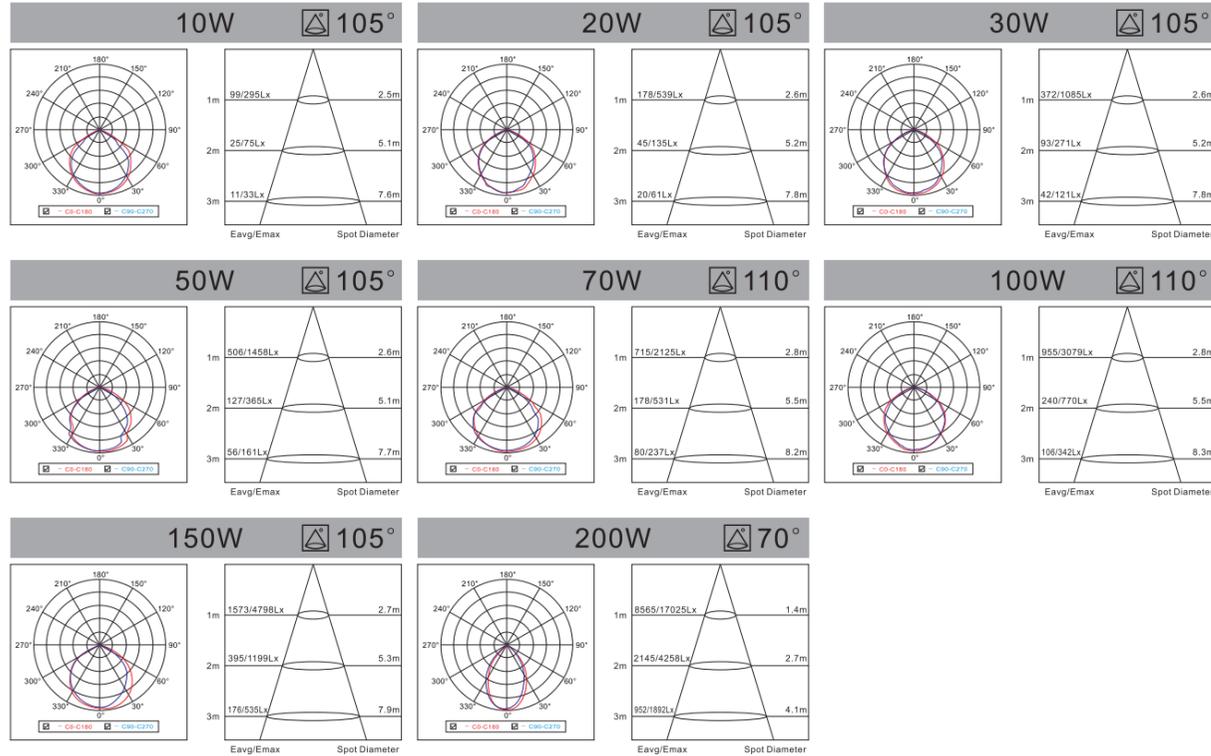

Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10X01	● 10W	890-950LM	N	137X32X118mm
LPFL-20X01	● 20W	1720-1810LM	N	180X37X187mm
LPFL-30X01	● 30W	2650-2730LM	N	193X37X197mm
LPFL-50X01	● 50W	4120-4200LM	N	258X42X257mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-100X01	● 100W	9150-9350LM	N	261X59X268mm
LPFL-150X01	● 150W	14100-14380LM	N	285X65X285mm
LPFL-200X01	● 200W	18800-19200LM	N	345X70X370mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-200X01	● 200W	20000-21000LM	N	345X110X375mm
LPFL-400X01	● 400W	40000-41000LM	N	405X105X430mm

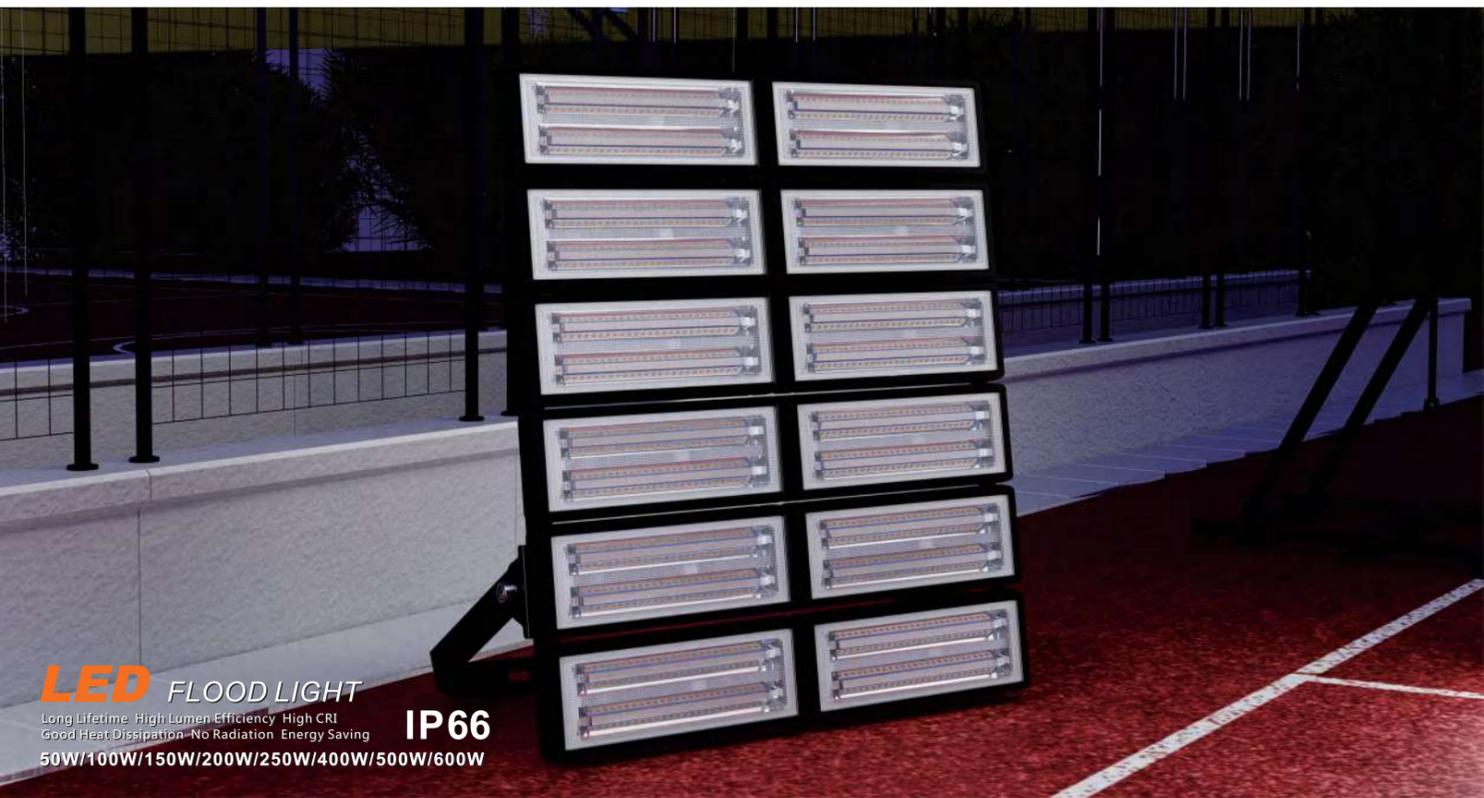


LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-50MS01	● 50W	4980-5120LM	N	295X70X138mm
LPFL-100MS01	● 100W	10560-11380LM	N	295X70X268mm
LPFL-150MS01	● 150W	14800-15500LM	N	298X73X378mm
LPFL-200MS01	● 200W	20800-21500LM	N	298X73X490mm

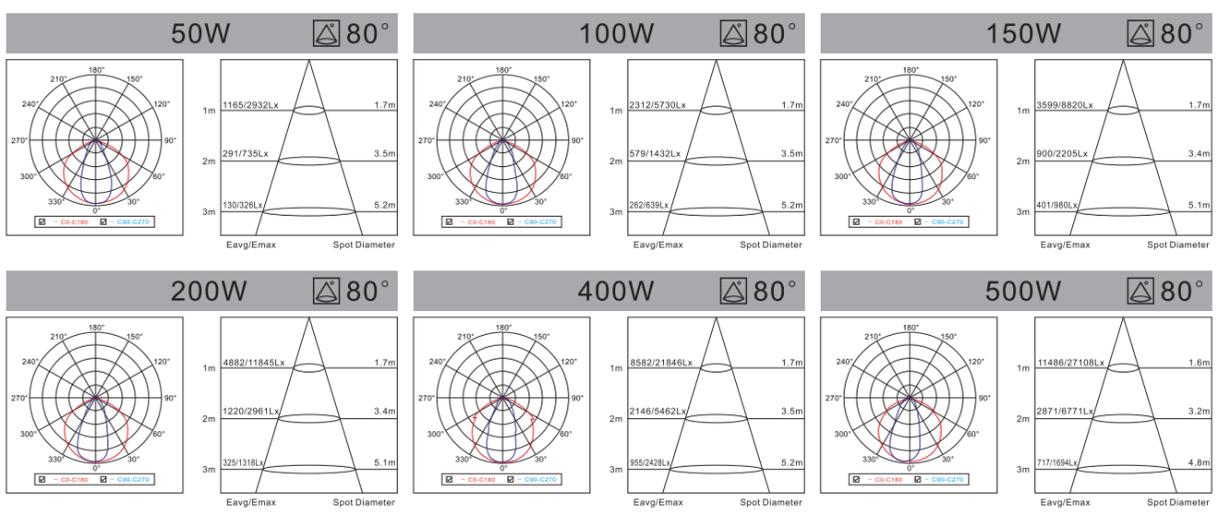

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-300MS01	● 300W	28900-29600LM	N	573X73X378mm
LPFL-400MS01	● 400W	39500-40200LM	N	573X73X490mm
LPFL-500MS01	● 500W	48600-49700LM	N	573X73X600mm
LPFL-600MS01	● 600W	58800-59500LM	N	573X73X710mm

Material
High Quality Aviation Aluminum

Color Temperature
 Warm White Cool White Natural White



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPGSL-07A01-Y	● 7W	525-595LM	N	70X90mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPGSL-10B01-Y	● 10W	900LM	N	103x89x70mm
LPGSL-20B01-Y	● 20W	1800LM	N	152x129x84mm
LPGSL-30B01-Y	● 30W	2700LM	N	192x162x95mm



Material

High Quality Aviation Aluminum

Color Temperature



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Verdunklung DIM	Produktgröße Product Size
LPWK-100HW01	● 100W	3.7V/4400mAh	N	340x282x70mm
LPWK-200HW01	● 200W	3.7V/8800mAh	N	400x312x70mm

Color Temperature





LED STREET LIGHT



AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50G01	● 50W	5130-6270LM	N	395x108x47mm	∅ 50/60mm
LPSTL-100G01	● 100W	10260-12540LM	N	458x120x49mm	∅ 50/60mm
LPSTL-150G01	● 150W	15390-18810LM	N	563x159x62mm	∅ 50/60mm
LPSTL-200G01	● 200W	20520-25080LM	N	650x173x62mm	∅ 50/60mm

Material
High Quality Aviation Aluminum

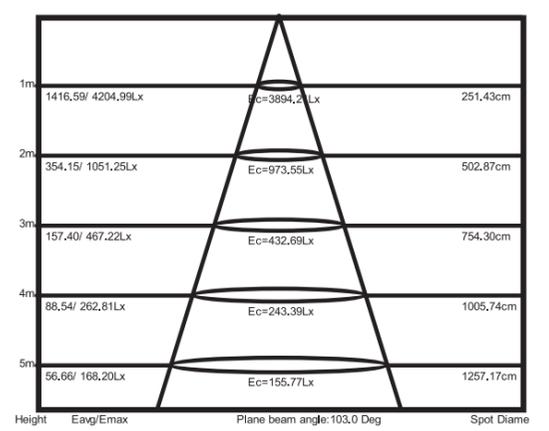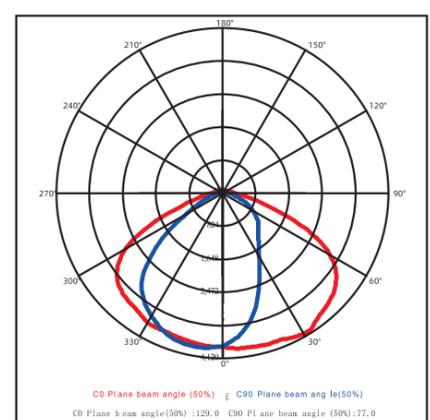

Color Temperature





LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50GS01	● 50W	5130-6270LM	N	470x107x92mm	∅ 50/60mm
LPSTL-100GS01	● 100W	10260-12540LM	N	535x120x92mm	∅ 50/60mm
LPSTL-150GS01	● 150W	15390-18810LM	N	604x159x92mm	∅ 50/60mm
LPSTL-200GS01	● 200W	20520-25080LM	N	693x173x92mm	∅ 50/60mm

Material

High Quality Aviation
Aluminum

Color Temperature



Warm White



Cool White



Natural White

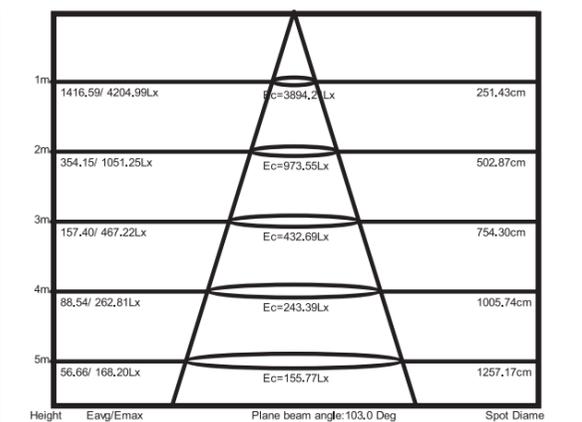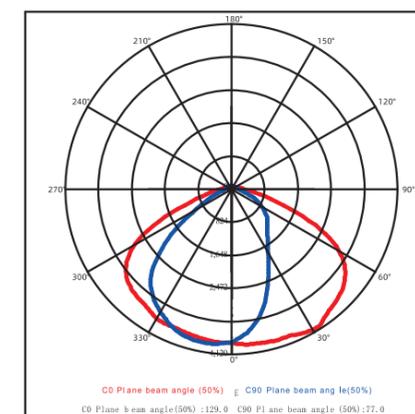




LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-20C01	● 20W	1900-2200LM	N	282X55X144mm	∅ 50mm
LPSTL-30C01	● 30W	2850-3300LM	N	282X55X144mm	∅ 50mm
LPSTL-50C01	● 50W	4750-5500LM	N	383X67X190mm	∅ 50mm
LPSTL-100C01	● 100W	9500-11000LM	N	490X85X225mm	∅ 50/60mm
LPSTL-100C01-G	● 100W	9500-11000LM	N	490X158X225mm	∅ 50/60mm
LPSTL-150C01	● 150W	14250-16500LM	N	600X95X272mm	∅ 50/60mm
LPSTL-200C01	● 200W	19000-22000LM	N	643X120X293mm	∅ 50/60mm

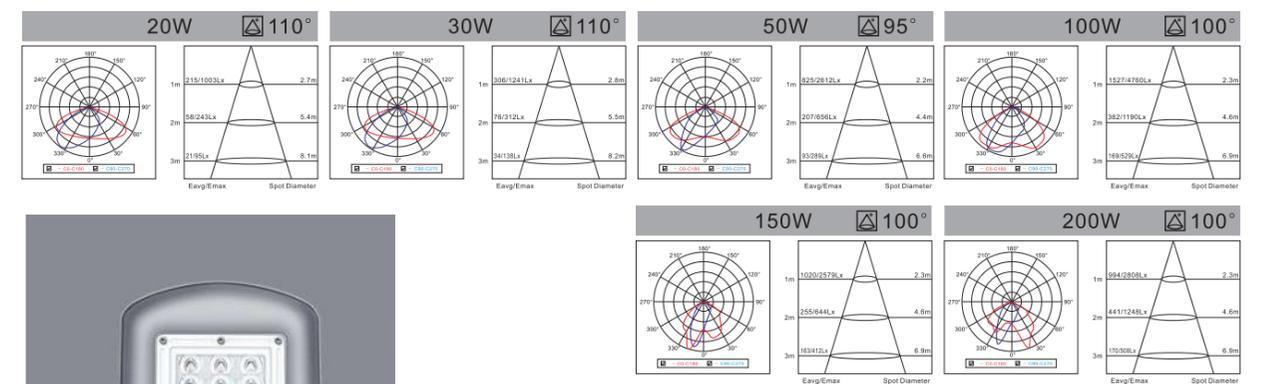

Material

High Quality Aviation Aluminum

Color Temperature

Warm White





Cool White



Natural White



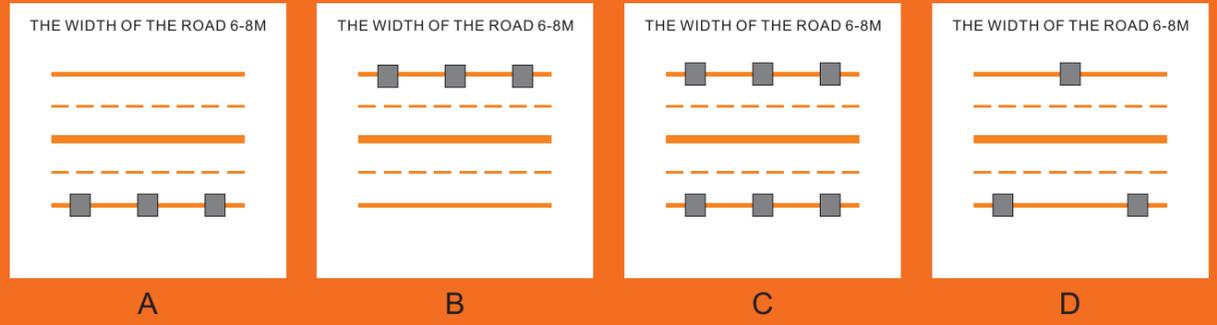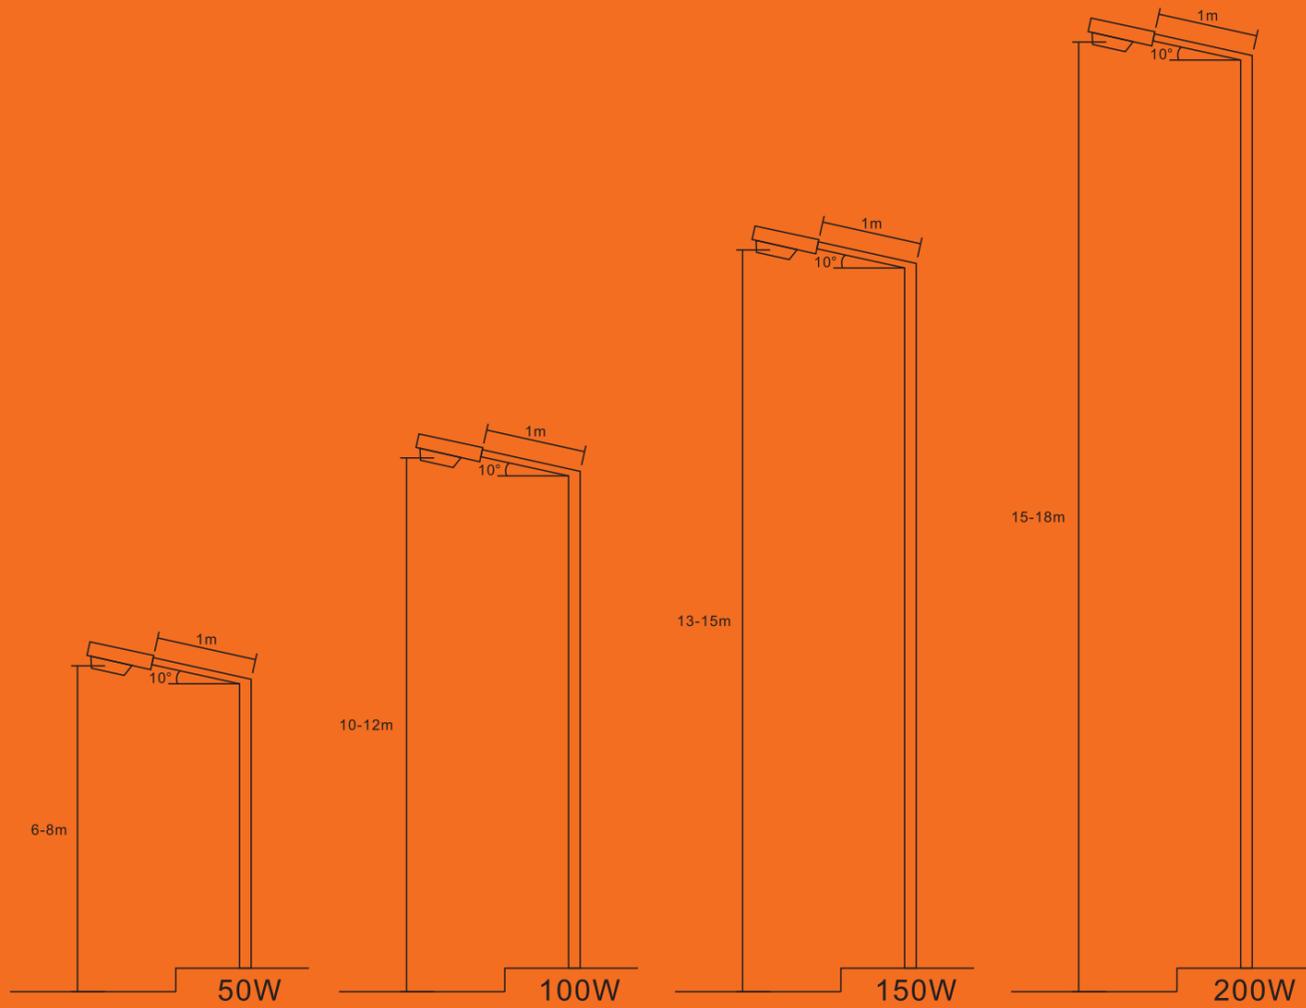



RECOMMENDED SPACING OF STREET LIGHTS					ROAD REFERENCE DATASHEET				
	A	B	C	D	Lm(cd/m ²)	U ₀	U ₁	TI[%]	EIR
50W	18-21m	18-21m	30-36m	32-38m	≥0.75	≥0.40	≥0.60	≤15	≥0.30
100W	30-36m	30-36m	52-68m	57-63m					
150W	42-48m	42-48m	57-63m	57-63m					
200W	45-51m	45-51m	57-63m	57-63m					

LED STREET LIGHT AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50A01	● 50W	3800-4360LM	N	373X80X300mm	∅ 50/60mm
LPSTL-100A01	● 100W	9200-9560LM	N	565X80X300mm	∅ 50/60mm
LPSTL-150A01	● 150W	12600-13350LM	N	757X80X300mm	∅ 50/60mm
LPSTL-200A01	● 200W	17500-18200LM	N	950X80X300mm	∅ 50/60mm

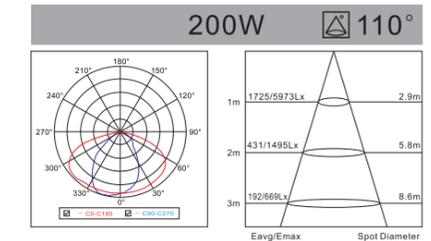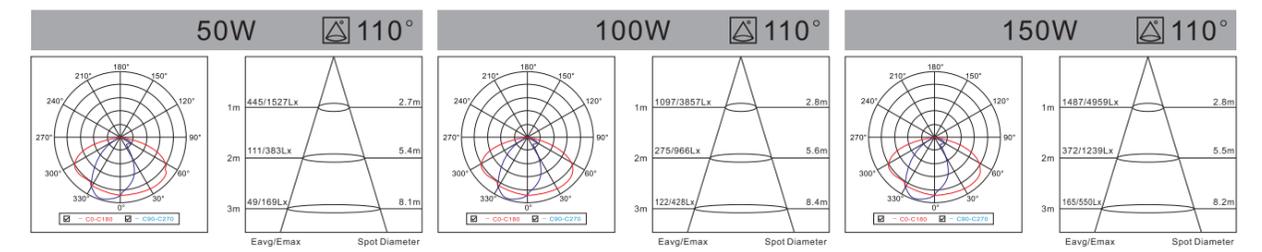

Color Temperature
 Warm White  Cool White  Natural White 

LED SOLAR LIGHT

CRI ≥ 80 H: 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-400D01-Y	● 400W	80Ah	1050×390×88	LFP Battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-200E01-Y	● 200W	6000mAh	360x181x48	LFP Battery

Color Temperature



LED SOLAR LIGHT

CRI ≥ 80 H: 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-100ES01-SS	● 100W	5000mAh	310x207x47mm	LFP battery
LPSTL-200ES01-SS	● 200W	6000mAh	385x207x47mm	LFP battery
LPSTL-300ES01-SS	● 300W	10000mAh	460x220x47mm	LFP battery
LPSTL-400ES01-SS	● 400W	15000mAh	580x236x47mm	LFP battery
LPSTL-500ES01-SS	● 500W	24000mAh	658x236x47mm	LFP battery

Color Temperature






LED SOLAR LIGHT

CRI ≥ 80 H: 20000h


IP65



Modell Model	Leistung Power	Opladtid Charging Time	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-100D01	100W	4-6 Hours	15Ah	510X50X320mm	∅ 55-60mm	LFP Battery
LPSTL-200D01	200W	4-6 Hours	26Ah	510X50X320mm	∅ 55-60mm	LFP Battery

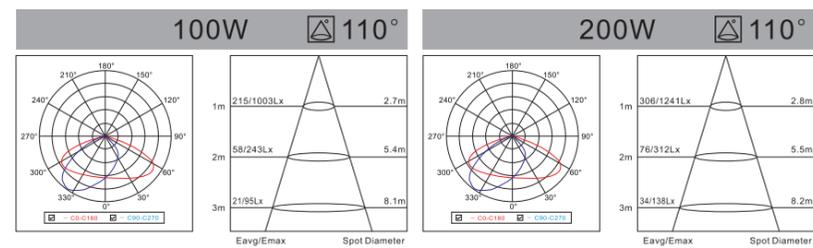

Color Temperature





LED SOLAR LIGHT

CRI ≥ 80 H: 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-100BS01-SS	100W	20Ah	670X350X590mm	Ø 50/60mm	LFP Battery
LPSTL-200BS01-SS	200W	30Ah	770X350X670mm	Ø 50/60mm	LFP Battery

Color Temperature



100W/200W
SOLAR STREET LIGHT **IP65**





LED SOLAR LIGHT


CRI ≥ 80 H:20000h

Control Mode: lighting controlled intelligent controller

IP65



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-30BS01-SS	● 30W	6.5Ah	200X120X430mm	Ø 55mm	LFP Battery
LPSTL-60BS01-SS	● 60W	12Ah	450X125X450mm	Ø 55mm	LFP Battery
LPSTL-90BS01-SS	● 90W	16.5Ah	510X125X510mm	Ø 55mm	LFP Battery

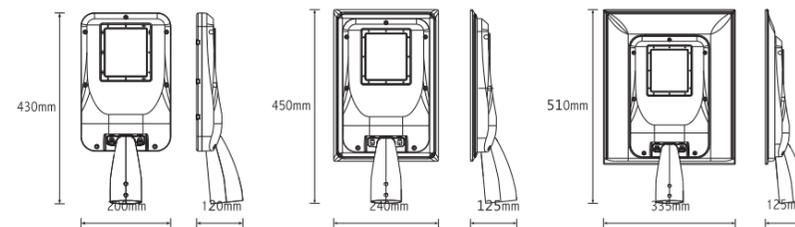

LED WALL LIGHT

CRI ≥ 80 H:20000h

Infrared Sensor



01:black 02:white

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size
LPWL-20B01	● 20W	3.6Ah	164X118X40mm
LPWL-40B01	● 40W	5.4Ah	224X118X48mm
LPWL-20B02	● 20W	3.6Ah	164X118X40mm
LPWL-40B02	● 40W	5.4Ah	224X118X48mm

Color Temperature





Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HF01-SS	● 100W	6Ah	LFP Battery
LPFL-200HF01-SS	● 200W	12Ah	LFP Battery
LPFL-300HF01-SS	● 300W	18Ah	LFP Battery
LPFL-400HF01-SS	● 400W	24Ah	LFP Battery

Color Temperature



LED SOLAR LIGHT

CRI ≥ 80 H: 20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW01-SS	● 100W	5AH	LFP battery
LPFL-200HW01-SS	● 200W	10AH	LFP battery
LPFL-300HW01-SS	● 300W	15AH	LFP battery
LPFL-400HW01-SS	● 400W	20AH	LFP battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW02-SS	● 100W	5AH	LFP battery
LPFL-200HW02-SS	● 200W	10AH	LFP battery
LPFL-300HW02-SS	● 300W	15AH	LFP battery
LPFL-400HW02-SS	● 400W	20AH	LFP battery

Color Temperature



LED SOLAR LIGHT

CRI≥80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPWL-100D01	● 100W	3.2V 4.4AH	LFP battery

LED SOLAR LIGHT

CRI≥80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPWL-100C01	● 100W	3.2V 2.2Ah	LFP Battery
LPWL-200C01	● 200W	3.2V 4.4Ah	LFP Battery

Infrared Sensor



YS: white YSB:black

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPDL-30MT01-YS	● 30W	3.2V 5.4Ah	LFP Battery
LPDL-30MT01-YSB	● 30W	3.2V 5.4Ah	LFP Battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100C01-G	● 100W	3.7V 2.2Ah	LFP Battery
LPFL-200C01-G	● 200W	3.7V 2.2Ah	LFP Battery

Color Temperature



Color Temperature





LED SOLAR LIGHT


CRI ≥ 80 H: 20000h



01:black 02:white


Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LP-MS30A01	● 30W	6Ah	LFP Battery
LP-MS40A01	● 40W	12Ah	LFP Battery
LP-MS30A02	● 30W	6Ah	LFP Battery
LP-MS40A02	● 40W	12Ah	LFP Battery




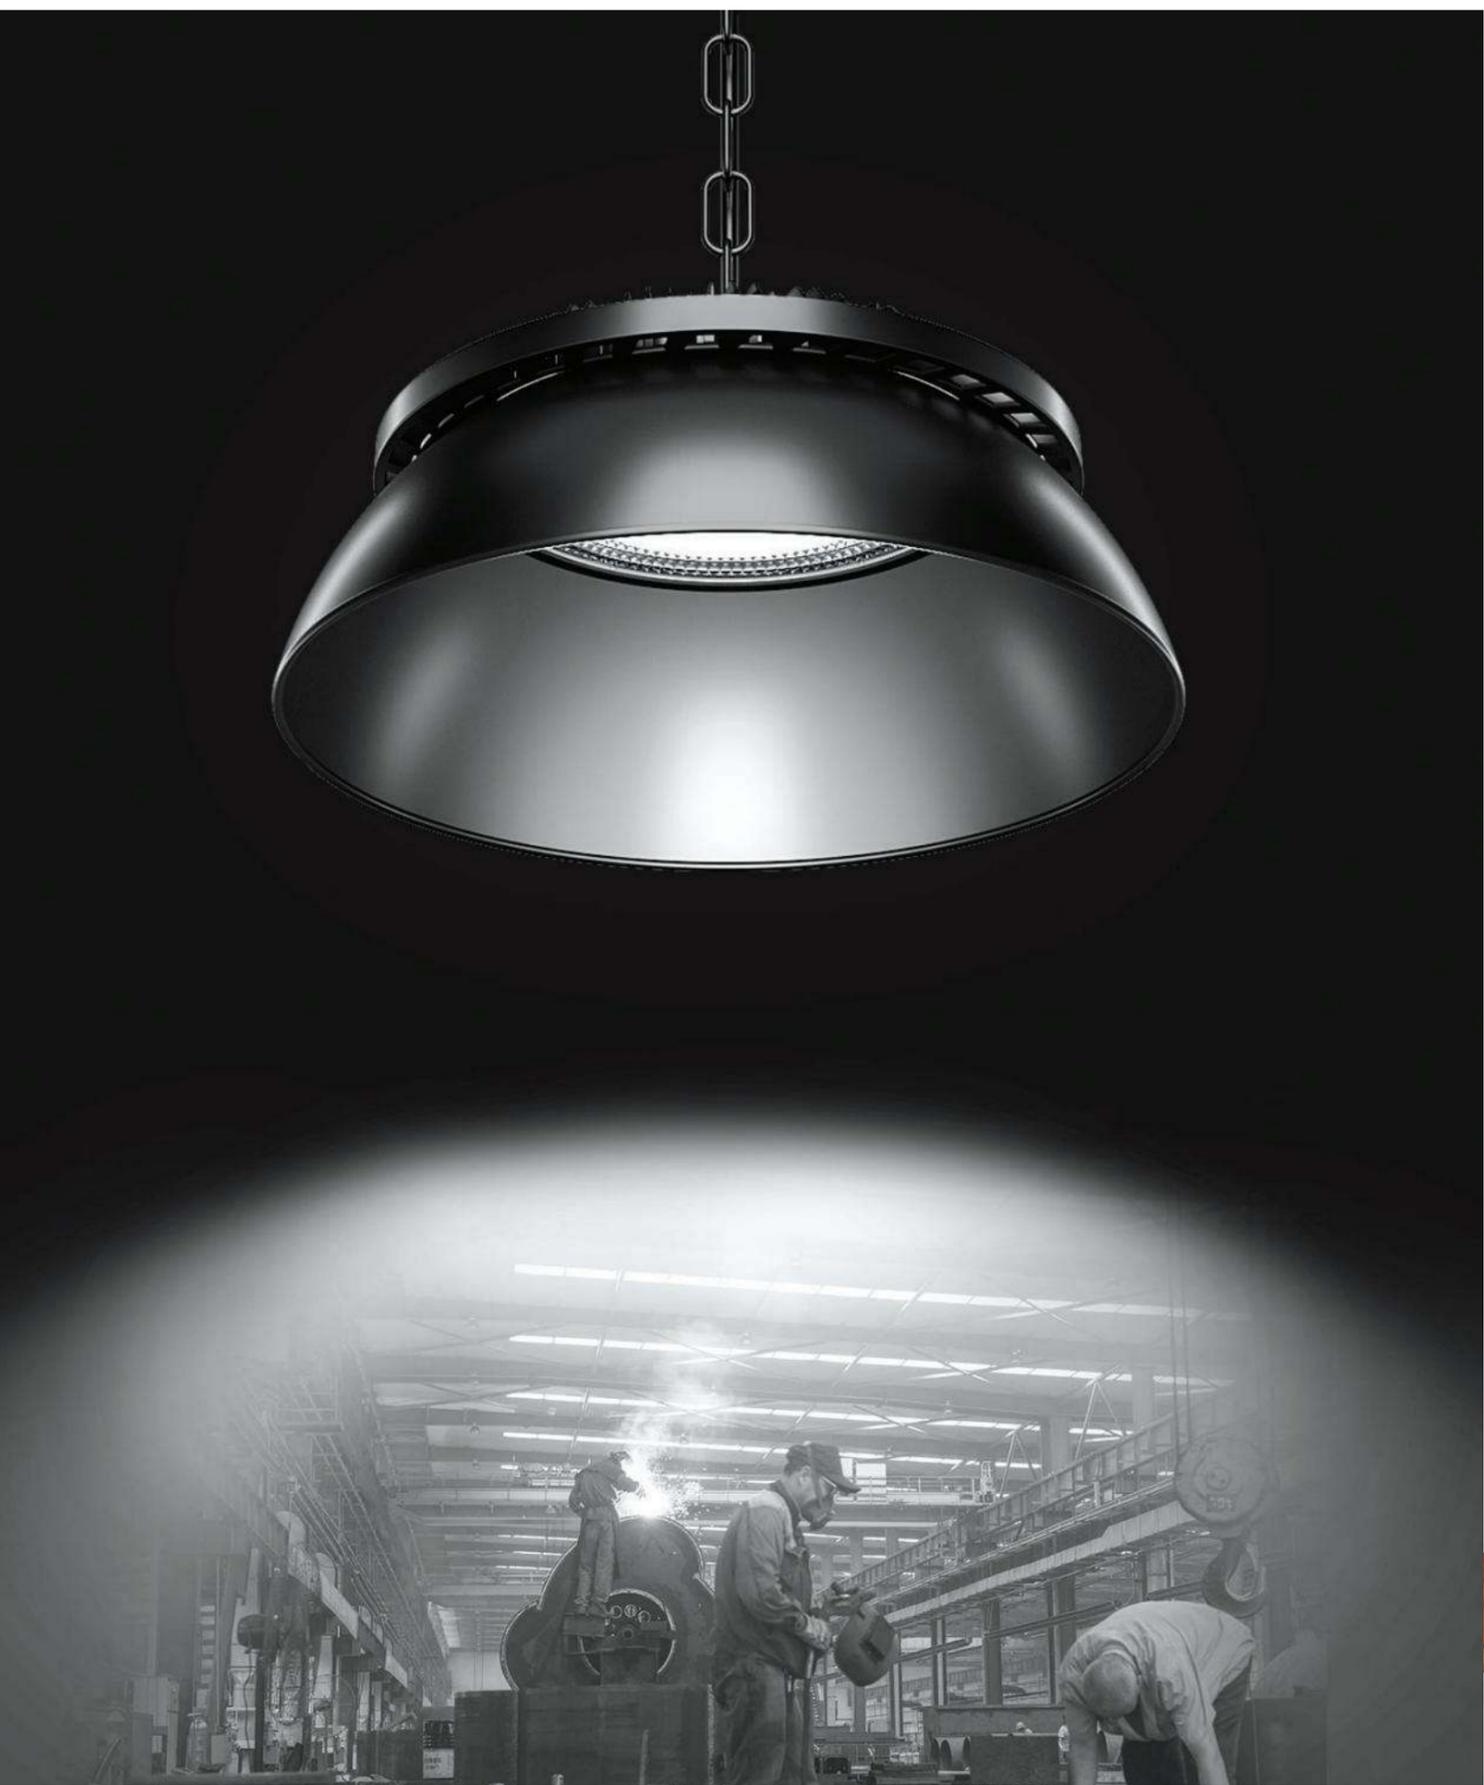

FRESH LIGHT FOR SUPERMARKET

Ra>90(AVERAGE OF R1-R8)
R9>0(OBJECT MORE COLORFUL)

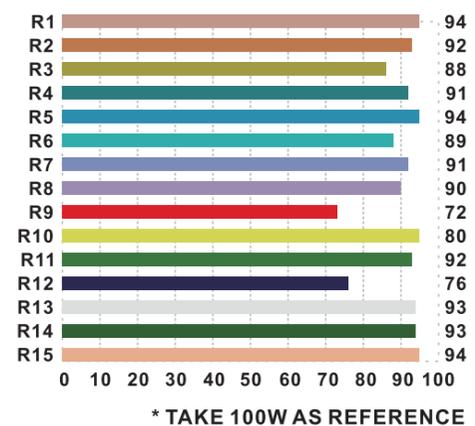

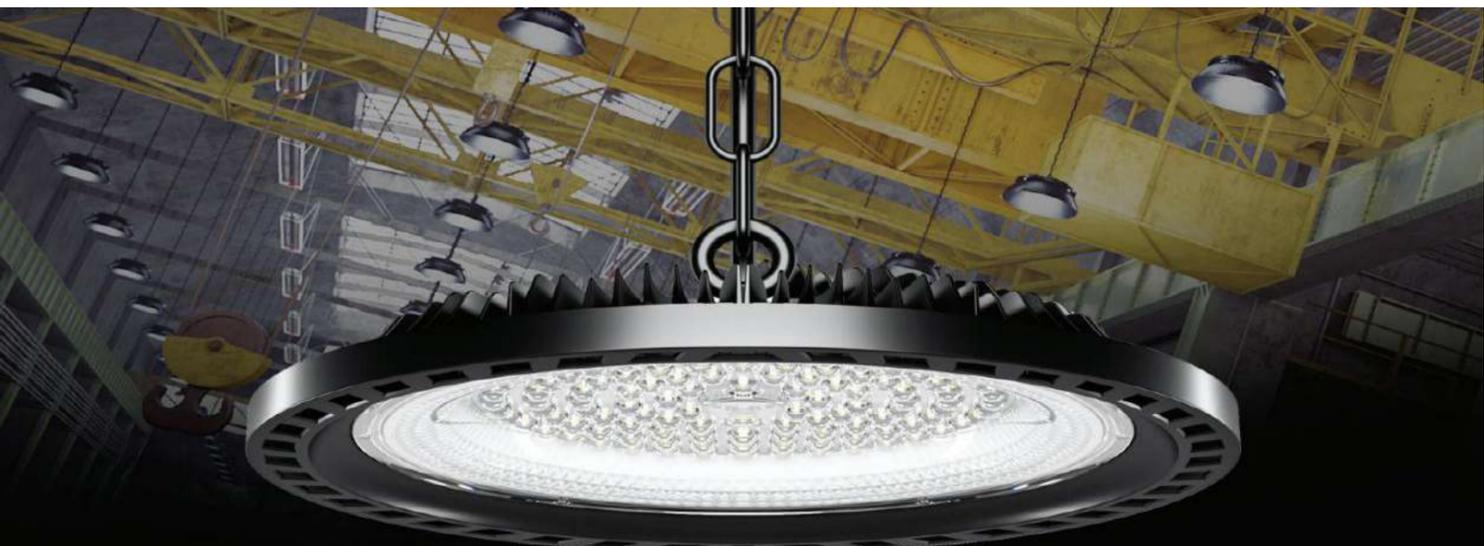


NEW
150W / 200W / 300W
IP65

LPWL-100D01



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-150BS01	● 150W	16500-20250LM	N	Ø 385X120mm
LPUF-200BS01	● 200W	22000-27000LM	N	Ø 385X120mm
LPUF-300BS01	● 300W	33000-40500LM	N	Ø 385X120mm

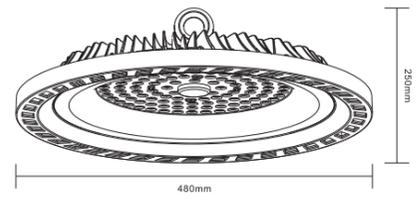

Material

High Quality Aviation Aluminum

Color Temperature



LED UFO LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-100E01	● 100W	10500-11550LM	N	Ø 263X63mm
LPUF-150E01	● 150W	14900-16390LM	N	Ø 315X69mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-75CS01	● 75W	7500-8250LM	N	Ø 256X32mm
LPUF-100CS01	● 100W	10000-11000LM	N	Ø 296X32mm
LPUF-150CS01	● 150W	15000-16500LM	N	Ø 365X32mm

Material

High Quality Aviation Aluminum

Color Temperature





LED LAMP


AC:100/220-240V CRI≥80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPUF-20AS-02	● 20W	1750-1850LM	N	∅ 130X70mm	E27/B22
LPUF-40AS-02	● 40W	3750-3850LM	N	∅ 190X103mm	E27/B22
LPUF-60AS-02	● 60W	5750-5850LM	N	∅ 255X130mm	E27/B22



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPUF-20AS-01	● 20W	1750-1850LM	N	∅ 130X70mm	E27/B22
LPUF-40AS-01	● 40W	3750-3850LM	N	∅ 190X103mm	E27/B22
LPUF-60AS-01	● 60W	5750-5850LM	N	∅ 255X130mm	E27/B22

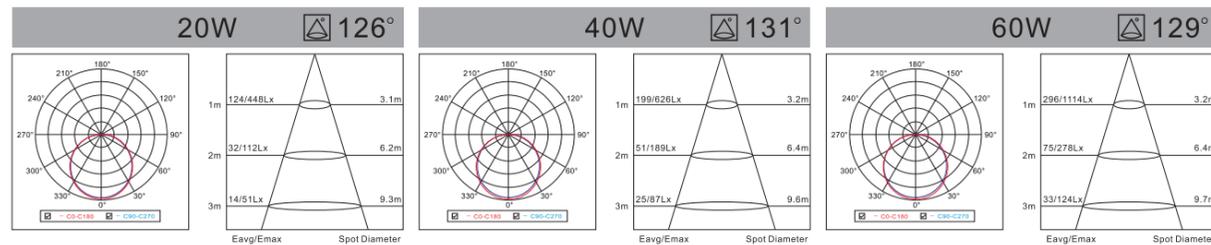

Color Temperature

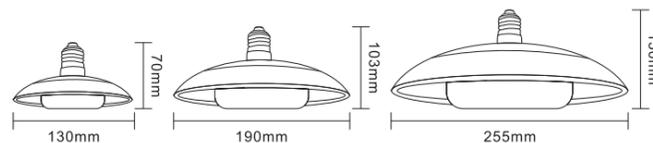

LED LAMP

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPQP5DLED-01	● 5W	430-470LM	N	∅ 60X106mm	E27/B22
LPQP7DLED-01	● 7W	600-660LM	N	∅ 60X106mm	E27/B22
LPQP9DLED-01	● 9W	770-860LM	N	∅ 60X108mm	E27/B22
LPQP12DLED-01	● 12W	1005-1105LM	N	∅ 60X110mm	E27/B22
LPQP15DLED-01	● 15W	1235-1365LM	N	∅ 70X124mm	E27/B22
LPQP18DLED-01	● 18W	1520-1680LM	N	∅ 80X145mm	E27/B22
LPQP20DLED-01	● 20W	1710-1890LM	N	∅ 80X145mm	E27/B22



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPQP20ES-01	● 20W	1900-2100LM	N	∅ 80X150mm	E27/B22
LPQP30ES-01	● 30W	2850-3150LM	N	∅ 100X185mm	E27/B22
LPQP40ES-01	● 40W	3610-3990LM	N	∅ 120X210mm	E27/B22
LPQP50ES-01	● 50W	4275-4725LM	N	∅ 138X240mm	E27/B22

Color Temperature



LED STEP LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP65



01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-07A01-Y	● 7W	595-640LM	N	∅228x81x30mm
LPWL-07A01YCCT	● 7W	595-640LM	N	∅228x81x30mm



01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-05A01-Y	● 5W	425-510LM	N	228x85x30mm
LPWL-05A01YCCT	● 5W	425-510LM	N	228x85x30mm

Color Temperature



LED STEP LIGHT


AC:100/220-240V CRI≥80 H:30000h


IP65



01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-05AS01-Y	● 5W	315-385LM	N	∅246X97X45mm
LPWL-05AS01-YCCT	● 5W	315-385LM	N	∅246X97X45mm
LPWL-07AS01-Y	● 7W	520-640LM	N	∅246X97X45mm
LPWL-07AS01-YCCT	● 7W	520-640LM	N	∅246X97X45mm



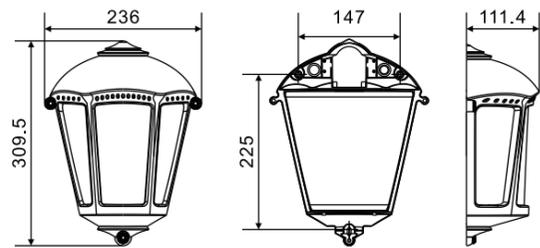

Modell Model	Leistung Power	Produktgröße Product Size
LPQP5DLED-01	● 5W	Ø 60X106mm
LPQP7DLED-01	● 7W	Ø 60X106mm
LPQP9DLED-01	● 9W	Ø 60X108mm
LPQP12DLED-01	● 12W	Ø 60X110mm




LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-04D01-Y	● 4W	190-230LM	N	142X95X51mm
LPWL-06D01-Y	● 6W	380-460LM	N	182X103X51mm
LPWL-08D01-Y	● 8W	510-610LM	N	218X111X59mm

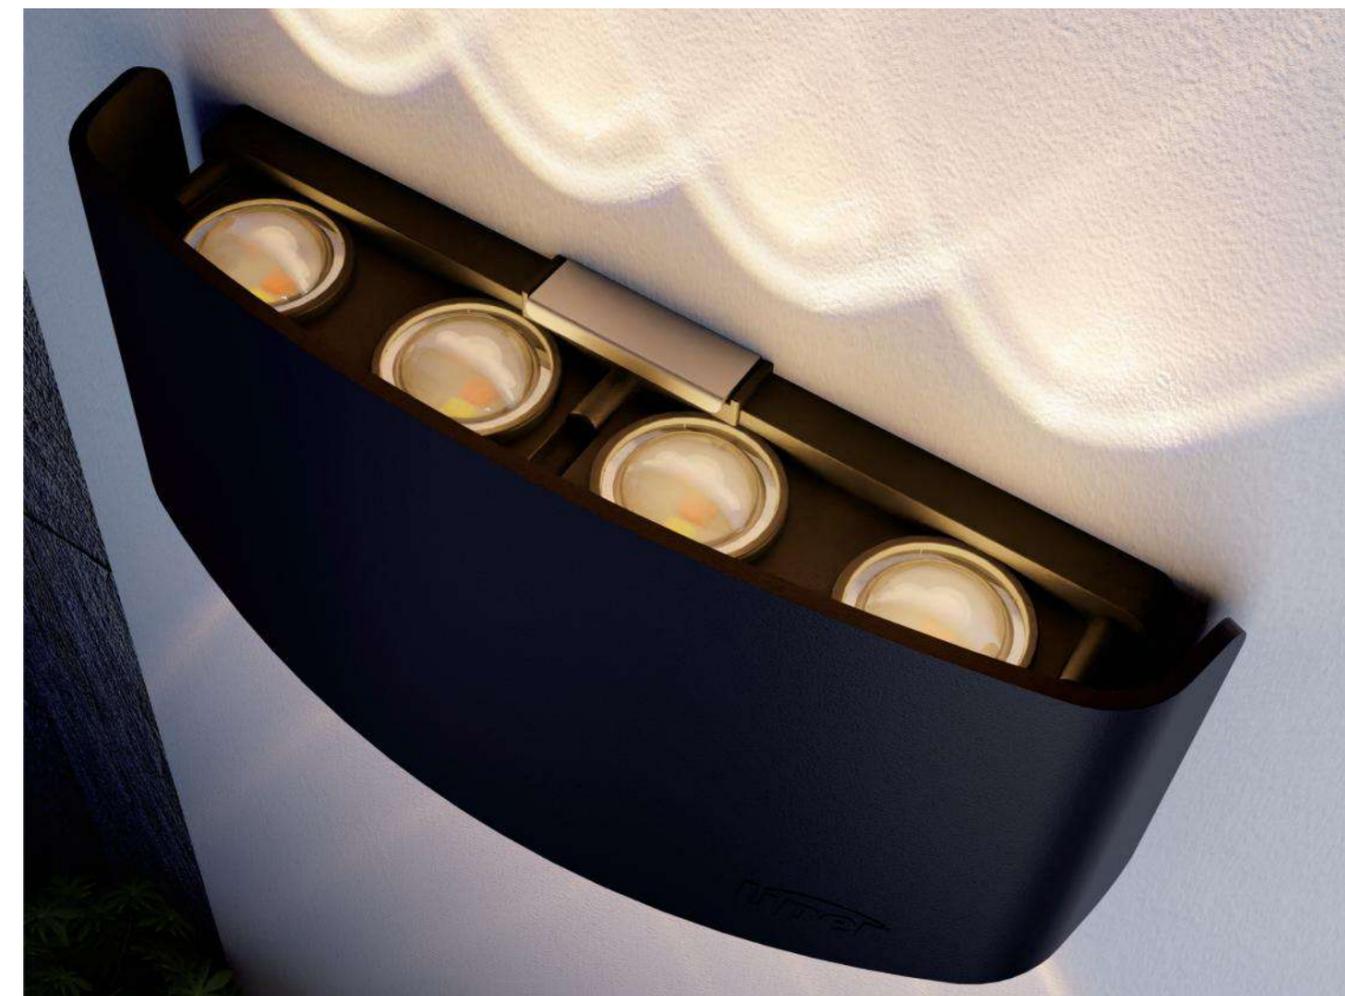


LED WALL LIGHT


AC:100/220-240V CRI≥80 H:30000h

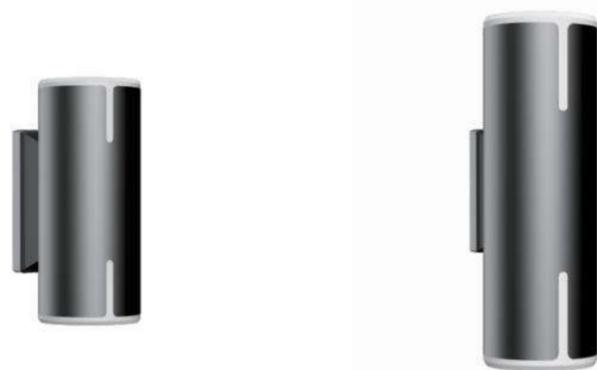

Modell Model	Leistung Power	Lumen Lumen	DIM DIM	Produktgröße Product Size
LPWL-08C01-Y	● 8W	440-480LM	N	∅70X165mm
LPWL-12C01-Y	● 12W	660-720LM	N	∅90X275mm

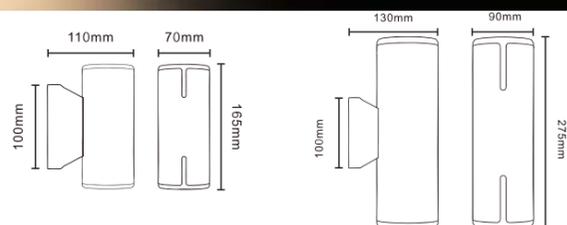


Color Temperature




LED WALL LIGHT


AC:100/220-240V CRI≥80 H:30000h

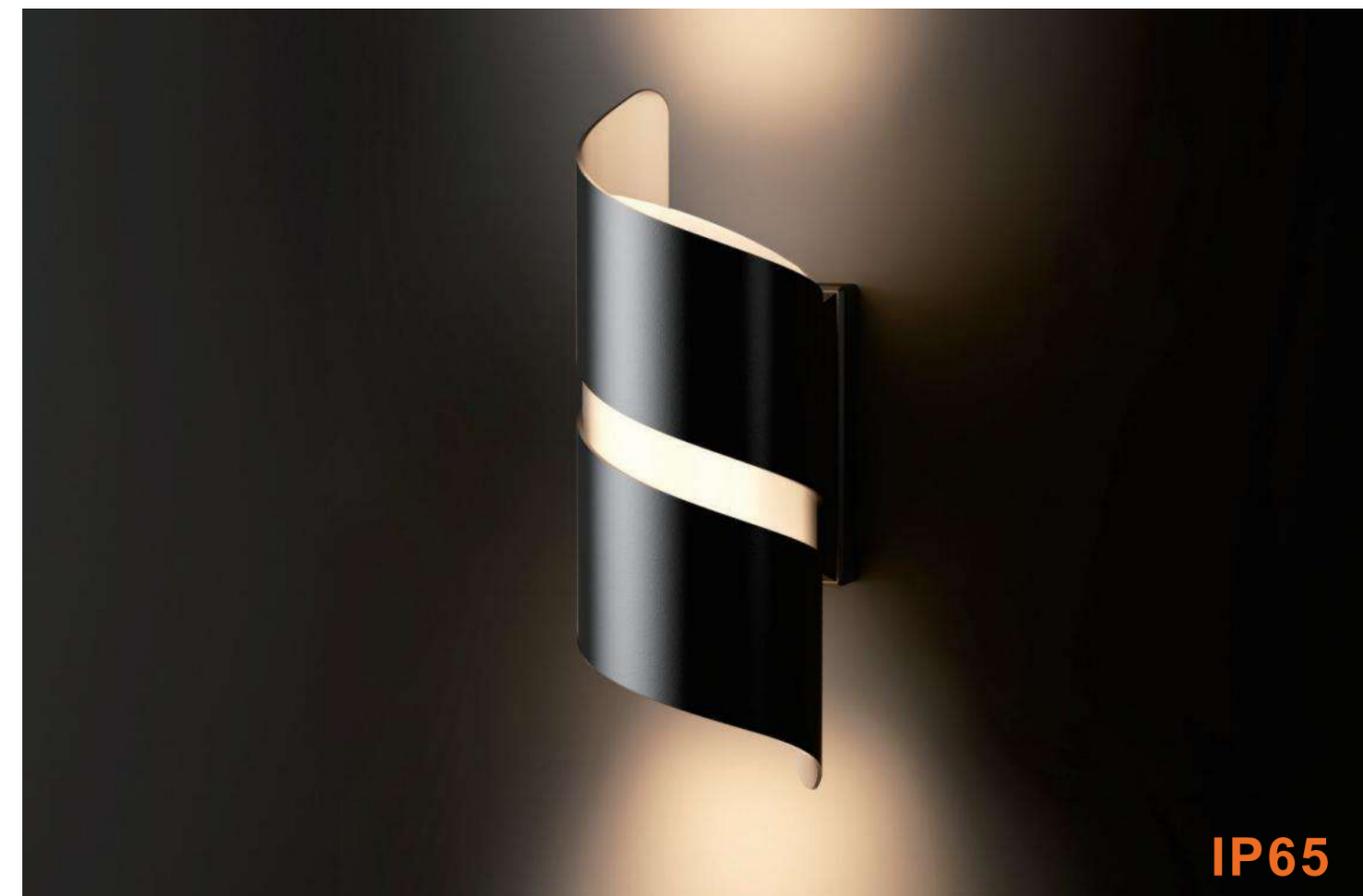


Modell Model	Leistung Power	Lumen Lumen	DIM DIM	Produktgröße Product Size
LPWL-10C01-Y	● 10W	550-600LM	N	∅80X230mm




Color Temperature



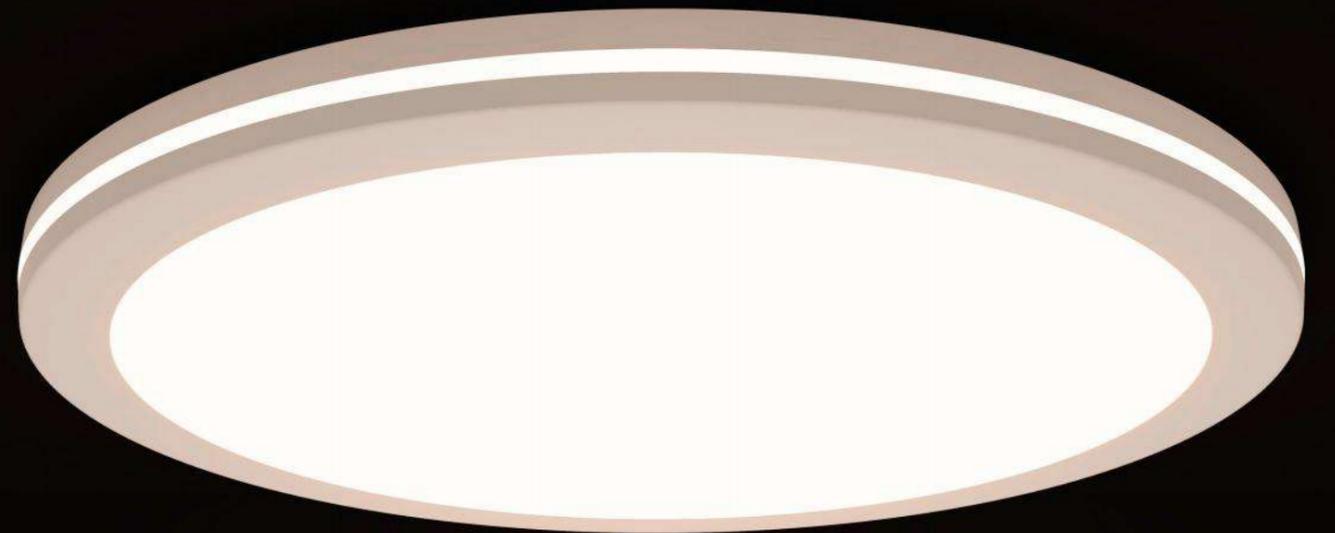



IP65 Anti-insect


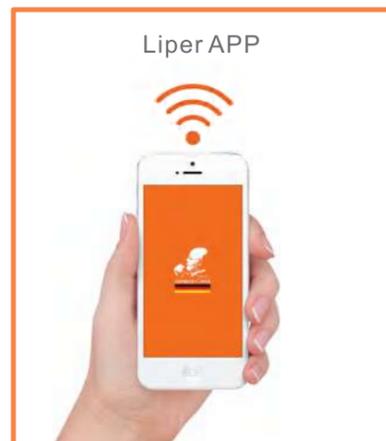


IP65 DOWN LIGHT


AC:100/220-240V CRI≥80 H:30000h




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MA01-Y	● 20W	1600-1700LM	N	∅ 182X48mm
LP-DL30MA01-Y	● 30W	2400-2500LM	N	∅ 235X52mm
LP-DL40MA01-Y	● 40W	3200-3300LM	N	∅ 292X55mm
LP-DL50MA01-Y	● 50W	5000-5100LM	N	∅ 380X55mm
LP-DL60MA01-Y	● 60W	5130-5670LM	N	∅ 495X53mm
LP-DL20MA01-YG(SENSOR)	● 20W	1600-1700LM	N	∅ 182X48mm
LP-DL30MA01-YG(SENSOR)	● 30W	2400-2500LM	N	∅ 235X52mm

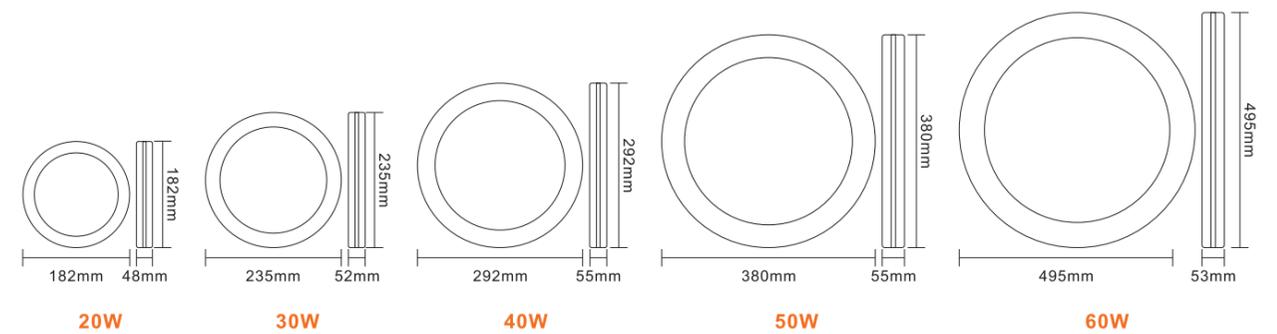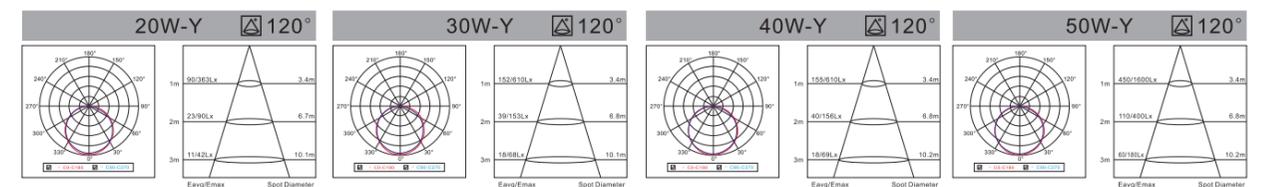

Color Temperature




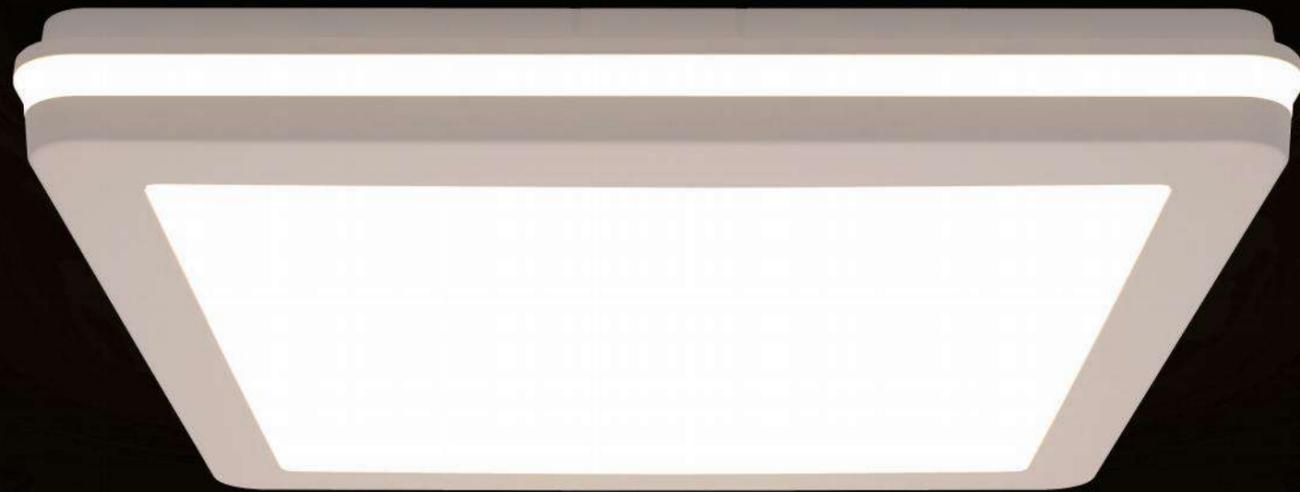


IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MA01-F	● 30W	2400-2500LM	N	215X57X215mm
LP-DL40MA01-F	● 40W	3200-3300LM	N	265X55X265mm
LP-DL30MA01-FG(SENSOR)	● 30W	2400-2500LM	N	215X48X215mm
LP-DL40MA01-FG(SENSOR)	● 40W	3200-3300LM	N	265X55X265mm

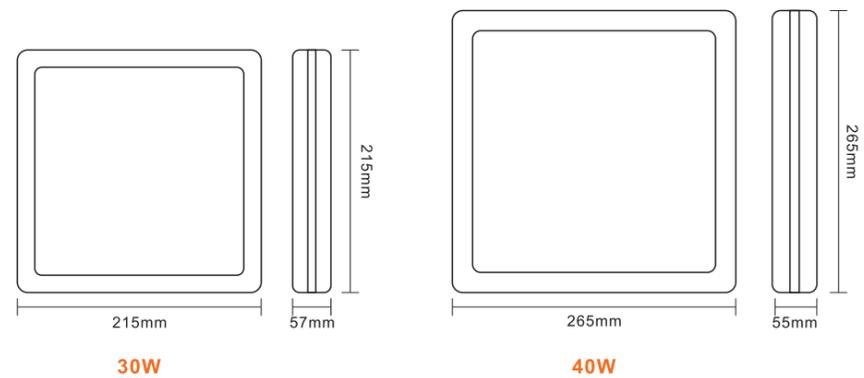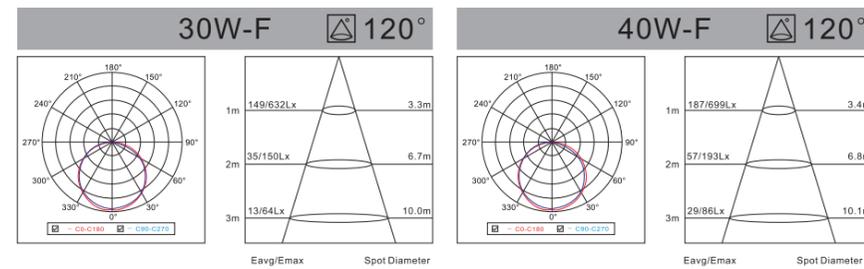

Color Temperature



IP65 Anti-insect





LED WATERPROOF DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h





T/Y: white TH/YH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MT01-T	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT01-Y	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT01-Y	● 30W	2700-2800LM	N	∅256X76mm
LP-DL20MT01-TH	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT01-YH	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT01-YH	● 30W	2700-2800LM	N	∅256X76mm



T/Y: white TH/YH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MT02-T	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT02-Y	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT02-Y	● 30W	2700-2800LM	N	∅256X76mm
LP-DL20MT02-TH	● 20W	1800-1900LM	N	255X125X72mm
LP-DL20MT02-YH	● 20W	1800-1900LM	N	∅206X72mm
LP-DL30MT02-YH	● 30W	2700-2800LM	N	∅256X76mm

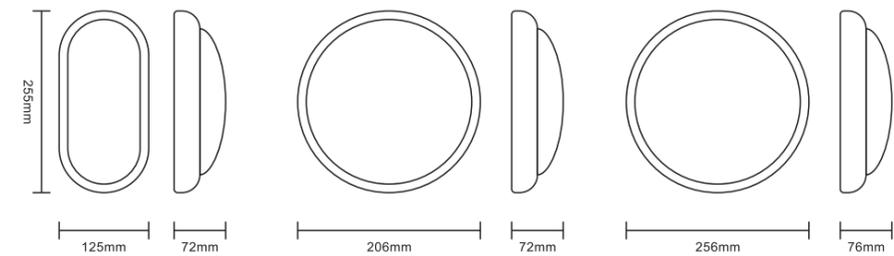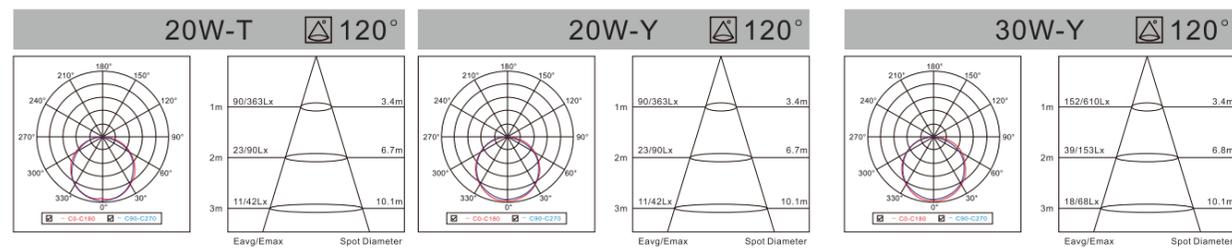

Color Temperature






LED WATERPROOF DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



F: white FH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MT02-F	● 30W	2755-3045LM	N	205X60X205mm
LP-DL40MT02-F	● 40W	3610-3990LM	N	260X60X260mm
LP-DL30MT02-FH	● 30W	2755-3045LM	N	205X60X205mm
LP-DL40MT02-FH	● 40W	3610-3990LM	N	260X60X260mm

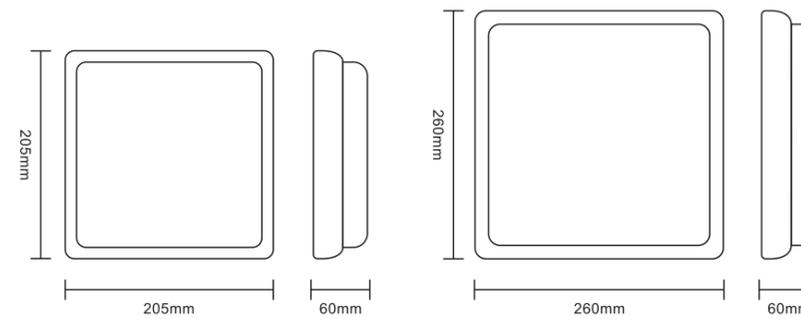


WITH SENSOR
 Advised installation height : 3-5m
 Max detection distance : 10m

Color Temperature







LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



T : white TB : black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MF01-T	● 20W	1710-1890LM	N	224X56X138
LP-DL30MF01-Y	● 30W	2570-2840LM	N	255X55X255
LP-DL20MF01-TB	● 20W	1710-1890LM	N	224X56X138
LP-DL30MF01-YB	● 30W	2570-2840LM	N	255X55X255

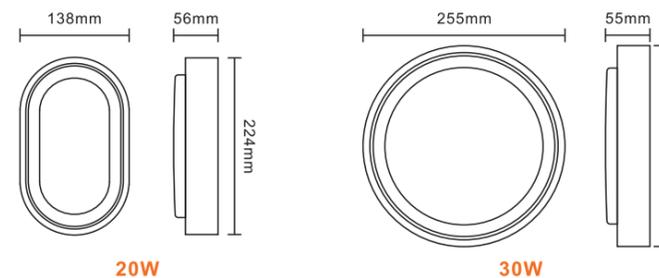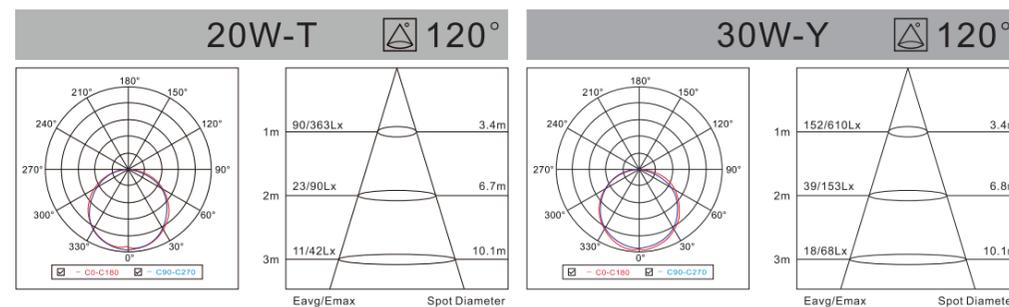

Material

High Quality Aviation Aluminum

Color Temperature





LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h


IP65



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-25MS01-Y	● 25W	2125-2250LM	N	Ø215X65mm
LPDL-35MS01-Y	● 35W	2975-3150LM	N	Ø282X77mm
LPDL-45MS01-Y	● 45W	3825-4050LM	N	Ø330X86mm
LPDL-25MS01-YCCT	● 25W	2125-2250LM	N	Ø215X65mm
LPDL-35MS01-YCCT	● 35W	2975-3150LM	N	Ø282X77mm
LPDL-45MS01-YCCT	● 45W	3825-4050LM	N	Ø330X86mm



Color Temperature







Radar Sensor
 Lux: <25lux
 Sensing Distance: 5-8meter
 Time-Delay: 90s

LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h




20W



24W

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MF01-TB-C	● 20W	1800LM	N	225X138X62
LP-DL20MF01-TB-CG(SENSOR)	● 20W	1800LM	N	225X138X62
LP-DL24MF01-YB-C	● 24W	2160LM	N	255X65X255
LP-DL24MF01-YB-CG(SENSOR)	● 24W	2160LM	N	255X65X255



15W

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-15MF01-F-C	● 15W	1275-1315LM	N	198X160X46mm

Material
 High Quality Aviation
 Aluminum

Color Temperature
 Warm White
 Cool White
 Natural White

LED DOWN LIGHT

AC:100/220-240V CRI≥90 H:30000h



IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-40MW01-Y	● 40W	3600LM	N	Ø400X20mm
LPDL-50MW01-Y	● 50W	4500LM	N	Ø500X20mm
LPDL-60MW01-Y	● 60W	5400LM	N	Ø600X20mm



40W/50W/60W 120°

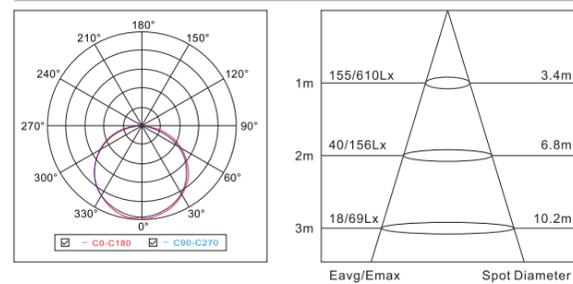

ALL IN ONE
2700K 4000K 6500K

Color Temperature



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-06EMS01-Y	● 6W	378-462LM	N	Ø 110x39mm
LPDL-12EMS01-Y	● 12W	864-1056LM	N	Ø 172x39mm
LPDL-18EMS01-Y	● 18W	1296-1584LM	N	Ø 222x39mm
LPDL-24EMS01-Y	● 24W	1836-2244LM	N	Ø 280x39mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-12EMS01-F	● 12W	864-1056LM	N	172x37.5mm
LPDL-18EMS01-F	● 18W	1296-1584LM	N	203x37.5mm
LPDL-24EMS01-F	● 24W	1836-2244LM	N	256x37.5mm

Color Temperature



LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-10A01-Y	● 10W	850-935LM	N	Ø75X100mm
LPCL-15A01-Y	● 15W	1275-1360LM	N	Ø75X150mm
LPCL-20A01-Y	● 20W	1700-1785LM	N	Ø95X150mm
LPCL-30A01-Y	● 30W	2550-2635LM	N	Ø115X135mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-10A01-YB	● 10W	850-935LM	N	Ø75X100mm
LPCL-15A01-YB	● 15W	1275-1360LM	N	Ø75X150mm
LPCL-20A01-YB	● 20W	1700-1785LM	N	Ø95X150mm
LPCL-30A01-YB	● 30W	2550-2635LM	N	Ø115X135mm

Color Temperature



LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-15A01-YR	● 15W	1275-1360LM	N	Ø85X88mm
LPCL-15A01-YRCCT	● 15W	1275-1360LM	N	Ø85X88mm
LPCL-15A01-YBR	● 15W	1275-1360LM	N	Ø85X88mm
LPCL-15A01-YBRCT	● 15W	1275-1360LM	N	Ø85X88mm







IP44

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

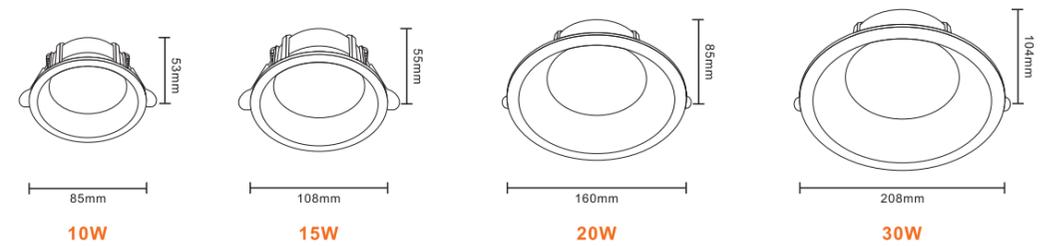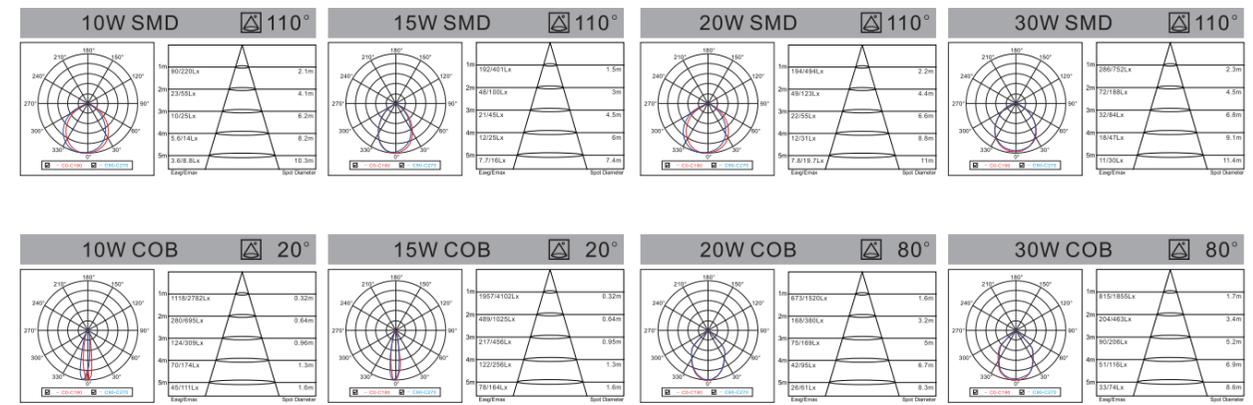

- Material**
High Quality Aviation Aluminum
- Color Temperature**
 Warm White
 Cool White
 Natural White
 CCT Adjustable

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

COB




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G01-Y	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G01-Y	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G01-Y	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G01-Y	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G01-YB	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G01-YB	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G01-YB	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G01-YB	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm

Color Temperature



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

SMD




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G02-Y	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G02-Y	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G02-Y	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G02-Y	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G02-YB	● 10W	780-840LM	N	∅ 85X53mm	∅ 75-80mm
LP-DL15G02-YB	● 15W	1150-1250LM	N	∅ 108X55mm	∅ 95-100mm
LP-DL20G02-YB	● 20W	1550-1650LM	N	∅ 165X85mm	∅ 145-150mm
LP-DL30G02-YB	● 30W	2300-2400LM	N	∅ 215X104mm	∅ 190-200mm

Color Temperature



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44




Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-10GS01-Y	● 10W	850-935LM	N	Ø85X53mm	Ø75-80mm
LPDL-15GS01-Y	● 15W	1275-1360LM	N	Ø108X55mm	Ø95-100mm
LPDL-10GS01-YB	● 10W	850-935LM	N	Ø85X53mm	Ø75-80mm
LPDL-15GS01-YB	● 15W	1275-1360LM	N	Ø108X55mm	Ø95-100mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-7GT01-Y	● 7W	560-595LM	N	Ø 90X46mm	Ø75-80mm
LPDL-10GT01-Y	● 10W	800-850LM	N	Ø 112X52mm	Ø95-100mm

Color Temperature



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

Pre-Embedded



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCL-10H02-Y	● 10W	850-935LM	N	Ø98X88mm	Ø75-80mm
LPCL-10H02-YB	● 10W	850-935LM	N	Ø98X88mm	Ø75-80mm



Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCL-10H01-Y	● 10W	850-935LM	N	Ø88X80mm	Ø75-80mm
LPCL-10H01-YB	● 10W	850-935LM	N	Ø88X80mm	Ø75-80mm


Color Temperature





IP44

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-06K01-Y	● 6W	600LM	N	Ø 95X28mm	Ø 50-90mm
LPDL-12K01-Y	● 12W	1200LM	N	Ø 129X28mm	Ø 75-110mm
LPDL-18K01-Y	● 18W	1800LM	N	Ø 170X28mm	Ø 100-150mm
LPDL-24K01-Y	● 24W	2400LM	N	Ø 228X28mm	Ø 150-210mm

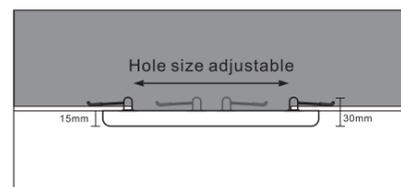

Color Temperature



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10EN01-Y	● 10W	1000-1050LM	N	Ø 90x30mm	Ø 50-85mm
LP-DL18EN01-Y	● 18W	1800-1950LM	N	Ø 115x30mm	Ø 60-105mm
LP-DL24EN01-Y	● 24W	2400-2550LM	N	Ø 160x30mm	Ø 75-150mm
LP-DL36EN01-Y	● 36W	3600-3750LM	N	Ø 215x31mm	Ø 90-200mm

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL03EC01-Y	● 3W	210-240LM	N	Ø 85x25mm	Ø 40-75mm
LP-DL06EC01-Y	● 6W	430-510LM	N	Ø 116x25mm	Ø 55-105mm
LP-DL12EC01-Y	● 12W	880-1020LM	N	Ø 166x25mm	Ø 55-155mm
LP-DL18EC01-Y	● 18W	1450-1530LM	N	Ø 219x25mm	Ø 55-210mm

Color Temperature






LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

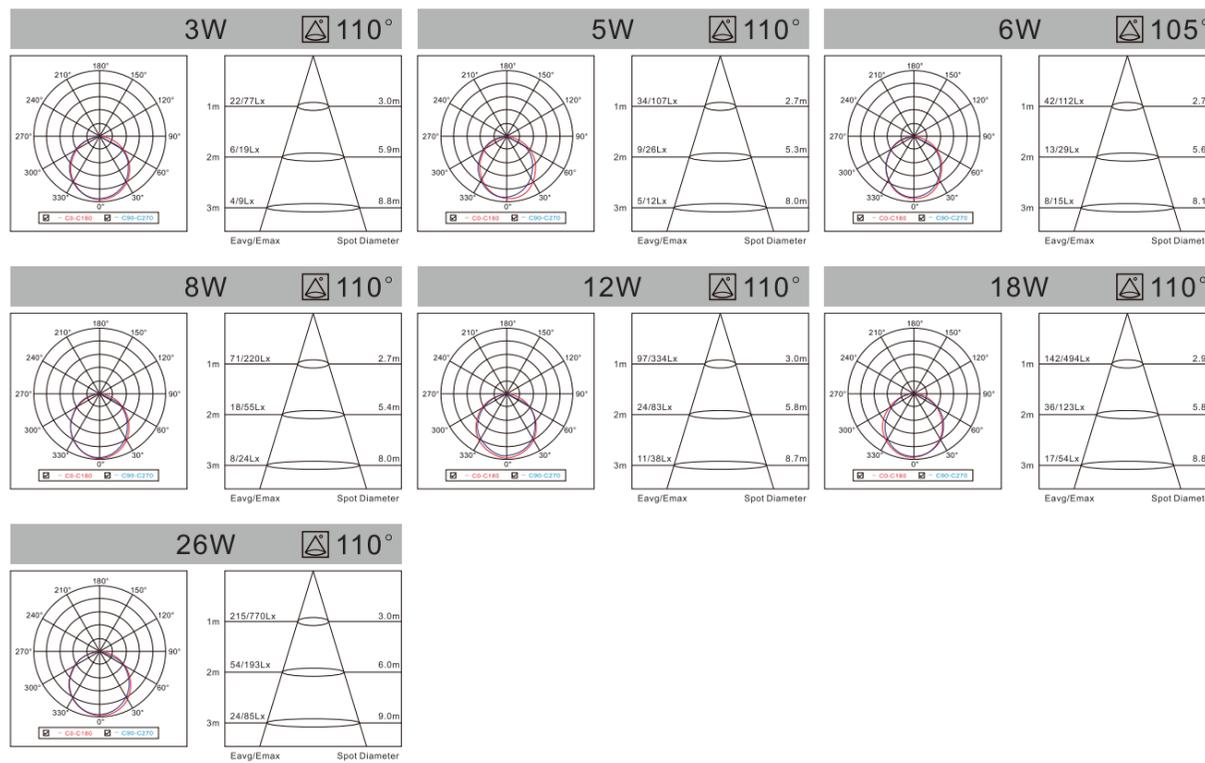

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL03EW03-Y1	● 3W	210-240LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL05EW03-Y1	● 5W	360-420LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL06EW03-YS	● 6W	430-510LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL06EW03-Y1	● 6W	430-510LM	N	Ø 120x28mm	Ø 90-110mm
LP-DL08EW03-Y1	● 8W	560-650LM	N	Ø 120x28mm	Ø 90-110mm
LP-DL12EW03-Y1	● 12W	880-1020LM	N	Ø 185x28mm	Ø 155-175mm
LP-DL18EW03-Y1	● 18W	1450-1530LM	N	Ø 225x28mm	Ø 195-215mm
LP-DL26EW03-Y1	● 26W	2110-2210LM	N	Ø 225x28mm	Ø 195-215mm

Color Temperature






LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

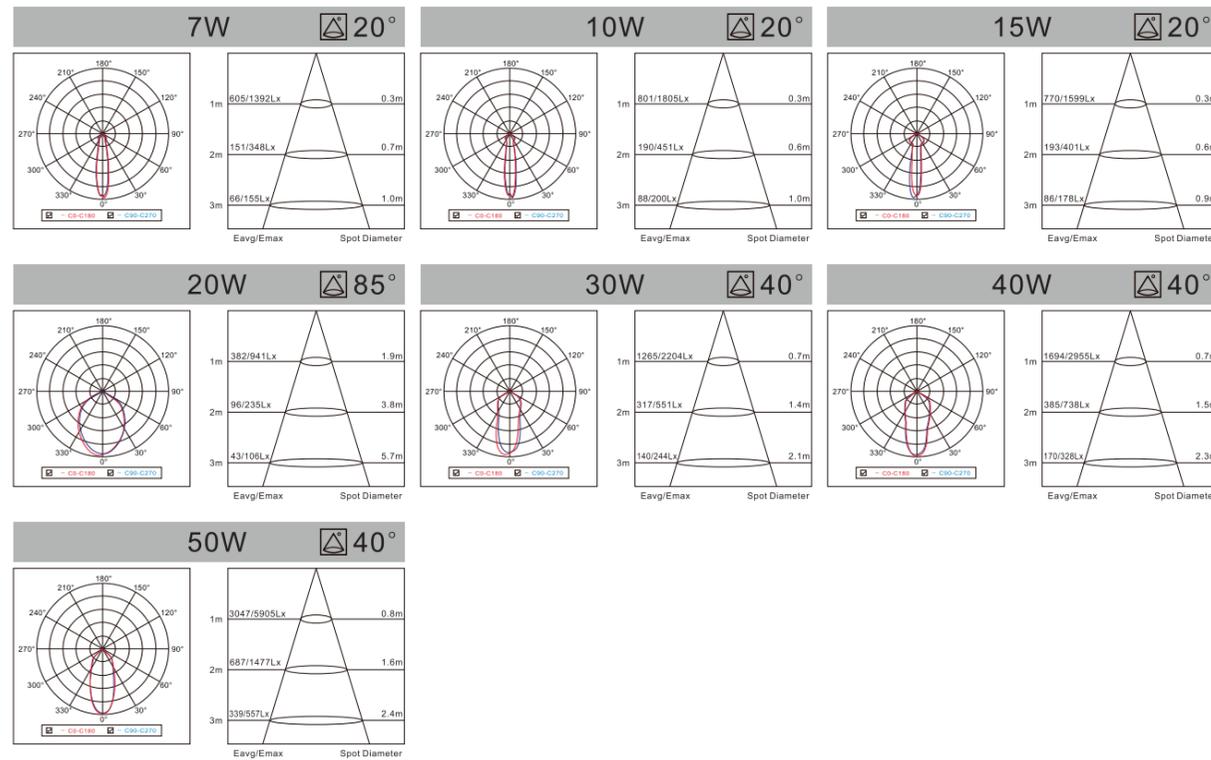

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB07BX01	7W	550-650LM	N	Ø 98x46mm	Ø 75-85mm
LP-COB10BX01	10W	850-950LM	N	Ø 115x47mm	Ø 95-105mm
LP-COB15BX01	15W	1350-1450LM	N	Ø 140x49mm	Ø 120-130mm

Material
High Quality Aviation Aluminum

Color Temperature

- Warm White
- Cool White
- Natural White



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB20BX01	20W	1750-1900LM	N	Ø 160x50mm	Ø 130-150mm
LP-COB30BX01	30W	2550-2650LM	N	Ø 196x60mm	Ø 160-185mm
LP-COB40BX01	40W	3450-3550LM	N	Ø 225x70mm	Ø 180-215mm
LP-COB50BX01	50W	4350-4450LM	N	Ø 225x95mm	Ø 180-215mm




LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h


IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-05EWS01-Y	● 5W	425-500LM	N	Ø 88X28mm	⌀ 65-80mm
LPDL-08EWS01-Y	● 8W	680-720LM	N	Ø 112X30mm	⌀ 90-100mm
LPDL-12EWS01-Y	● 12W	1020-1060LM	N	Ø 175X33mm	⌀ 145-150mm
LPDL-18EWS01-Y	● 18W	1530-1570LM	N	Ø 222X35mm	⌀ 185-200mm

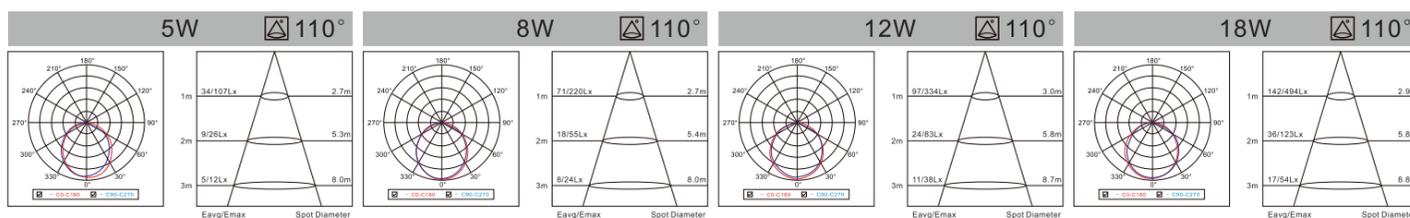

Color Temperature



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-05EWS01-YCCT	● 5W	425-500LM	N	Ø 88X28mm	⌀ 65-80mm
LPDL-08EWS01-YCCT	● 8W	680-720LM	N	Ø 112X30mm	⌀ 90-100mm
LPDL-12EWS01-YCCT	● 12W	1020-1060LM	N	Ø 175X33mm	⌀ 145-150mm
LPDL-18EWS01-YCCT	● 18W	1530-1570LM	N	Ø 222X35mm	⌀ 185-200mm

LED DOWN LIGHT

AC 000224240VCF1808H:80000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL07A01-YX	● 7W	550-650LM	N	∅ 98x47mm	∅ 75-85mm
LP-DL10A01-YX	● 10W	850-920LM	N	∅ 115x47mm	∅ 95-105mm
LP-DL15A01-YX	● 15W	1350-1450LM	N	∅ 140x51mm	∅ 120-130mm
LP-DL20A01-YX	● 20W	1850-1950LM	N	∅ 180x44mm	∅ 160-170mm
LP-DL30A01-YX	● 30W	2850-2950LM	N	∅ 228x44mm	∅ 205-215mm
LP-DL10A01-FX	● 10W	850-950LM	N	∅ 101x43mm	∅ 80-90mm
LP-DL15A01-FX	● 15W	1350-1450LM	N	∅ 119x43mm	∅ 100-110mm
LP-DL20A01-FX	● 20W	1850-1950LM	N	∅ 140x45mm	∅ 120-130mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07AS01-Y	● 7W	595-635LM	N	∅ 95x26mm	∅ 75-85mm
LPDL-12AS01-Y	● 12W	1020-1060LM	N	∅ 112x28mm	∅ 90-100mm
LPDL-20AS01-Y	● 20W	1700-1740LM	N	∅ 172x28mm	∅ 145-150mm
LPDL-30AS01-Y	● 30W	2550-2590LM	N	∅ 225x28mm	∅ 180-200mm

Material

High Quality Aviation Aluminum

Color Temperature



IP65




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07AS01-YW	● 7W	595-635LM	N	∅ 95x26mm	∅ 75-85mm
LPDL-12AS01-YW	● 12W	1020-1060LM	N	∅ 112x28mm	∅ 90-100mm
LPDL-20AS01-YW	● 20W	1700-1740LM	N	∅ 172x28mm	∅ 145-150mm
LPDL-30AS01-YW	● 30W	2550-2590LM	N	∅ 225x28mm	∅ 180-200mm

Color Temperature



LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

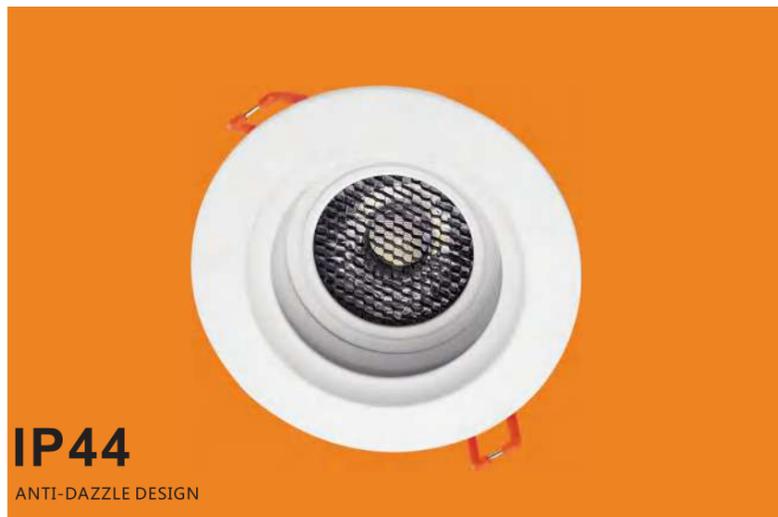


BUCKLE DESIGN, SCREW FREE INSTALLATION

IP44

ANTI-DAZZLE DESIGN



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB12FS01	● 12W	950-1050LM	N	Ø 108x65mm	⌀ 90-100mm
LP-COB12FS01-W	● 12W	950-1050LM	N	Ø 108x65mm	⌀ 90-100mm
LP-COB12FS02	● 12W	950-1050LM	N	Ø 108x65mm	⌀ 90-100mm
LP-COB12FS02-W	● 12W	950-1050LM	N	Ø 108x65mm	⌀ 90-100mm

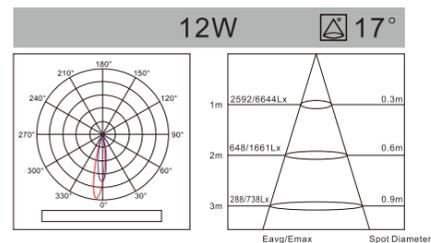

BUCKLE DESIGN
SCREW FREE INSTALLATION

Material

High Quality Aviation Aluminum

Color Temperature



LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h



IP44



F01 black inner circle
F02 black inner circle



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB03F01-F1	● 3W	260-310LM	N	∅ 90x35mm	⌀ 68-80mm
LP-COB03F02-F1	● 3W	260-310LM	N	∅ 90x35mm	⌀ 68-80mm
LP-COB05F01-F1	● 5W	350-360LM	N	∅ 90x35mm	⌀ 68-80mm
LP-COB05F02-F1	● 5W	350-360LM	N	∅ 90x35mm	⌀ 68-80mm
LP-COB08F01-F1	● 8W	630-720LM	N	∅ 110x50mm	⌀ 90-100mm
LP-COB08F02-F1	● 8W	630-720LM	N	∅ 110x50mm	⌀ 90-100mm
LP-COB12F01-F1	● 12W	950-1050LM	N	∅ 136x65mm	⌀ 120-130mm
LP-COB12F02-F1	● 12W	950-1050LM	N	∅ 136x65mm	⌀ 120-130mm



IP44

LED CEILING LIGHT


AC:100/220-240V CRI ≥ 80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-CL05G01-Y	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G02-Y	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G01-YB	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G01-YG	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL05G01-YBG	● 5W	440-480LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-Y	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G02-Y	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-YB	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-YG	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL07G01-YBG	● 7W	570-630LM	N	Ø88X42mm	∅75-80mm
LP-CL10G01-Y	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G02-Y	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G01-YB	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G01-YG	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm
LP-CL10G01-YBG	● 10W	800-900LM	N	Ø120X52mm	∅95-100mm






CCT Adjust by Driver



CCT Adjust by Switch


Color Temperature

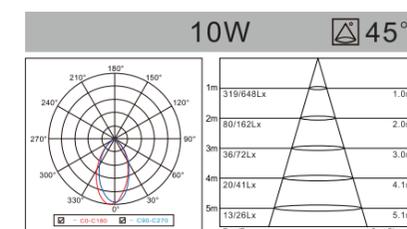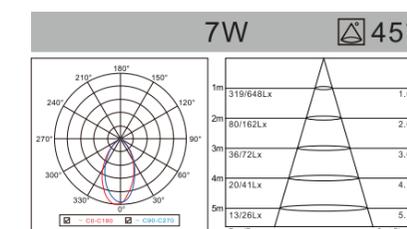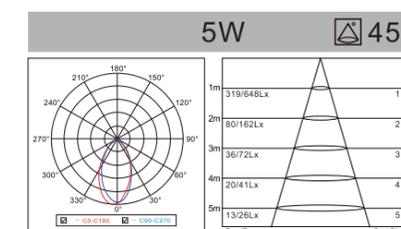

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



F01 black inner circle
F02 white inner circle

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
-----------------	-------------------	----------------	--------------------	------------------------------	---------------------

LP-COB03F01-S	● 3W	220-280LM	N	Ø 72x35mm	Ø 60mm
LP-COB03F02-S	● 3W	220-280LM	N	Ø 72x35mm	Ø 60mm

LP-COB03F01-Y1	● 3W	260-310LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB03F02-Y1	● 3W	260-310LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F01-Y1	● 5W	350-360LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F02-Y1	● 5W	350-360LM	N	Ø 90x35mm	Ø 68-80mm

LP-COB08F01-Y1	● 8W	630-720LM	N	Ø 110x50mm	Ø 90-100mm
LP-COB08F02-Y1	● 8W	630-720LM	N	Ø 110x50mm	Ø 90-100mm

LP-COB12F01-Y1	● 12W	950-1050LM	N	Ø 136x65mm	Ø 120-130mm
LP-COB12F02-Y1	● 12W	950-1050LM	N	Ø 136x65mm	Ø 120-130mm

LP-COB05F01-YT1	● 5W	310-360LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F02-YT1	● 5W	310-360LM	N	Ø 90x35mm	Ø 68-80mm




10°/20°/30° Selectable

Color Temperature



LED CEILING LIGHT


AC:100/220-240V CRI≥80 H:30000h

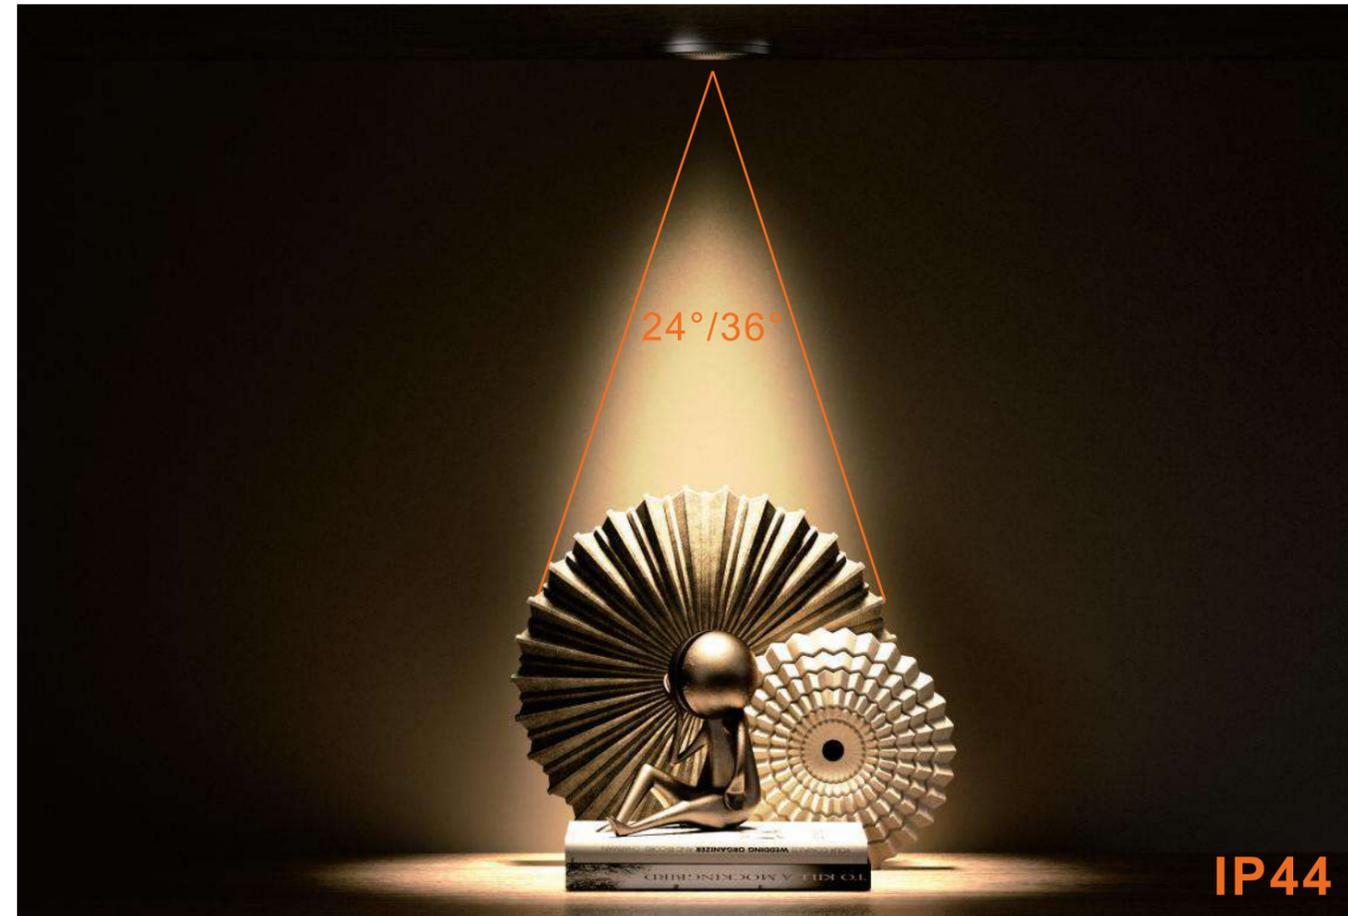


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
-----------------	-------------------	----------------	--------------------	------------------------------	---------------------

LPCOB-04FS01-YB	● 4W	320-340LM	N	Ø 40x41	Ø 30-35mm
LPCOB-04FS01-YBR	● 4W	320-340LM	N	Ø 35x41	Ø 30mm
LPCOB-04FS01-Y	● 4W	320-340LM	N	Ø 40x41	Ø 30-35mm
LPCOB-04FS01-YR	● 4W	320-340LM	N	Ø 35x41	Ø 30mm

Color Temperature

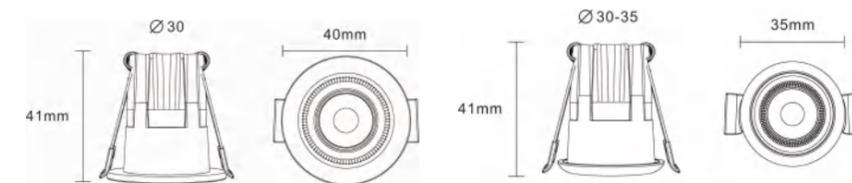

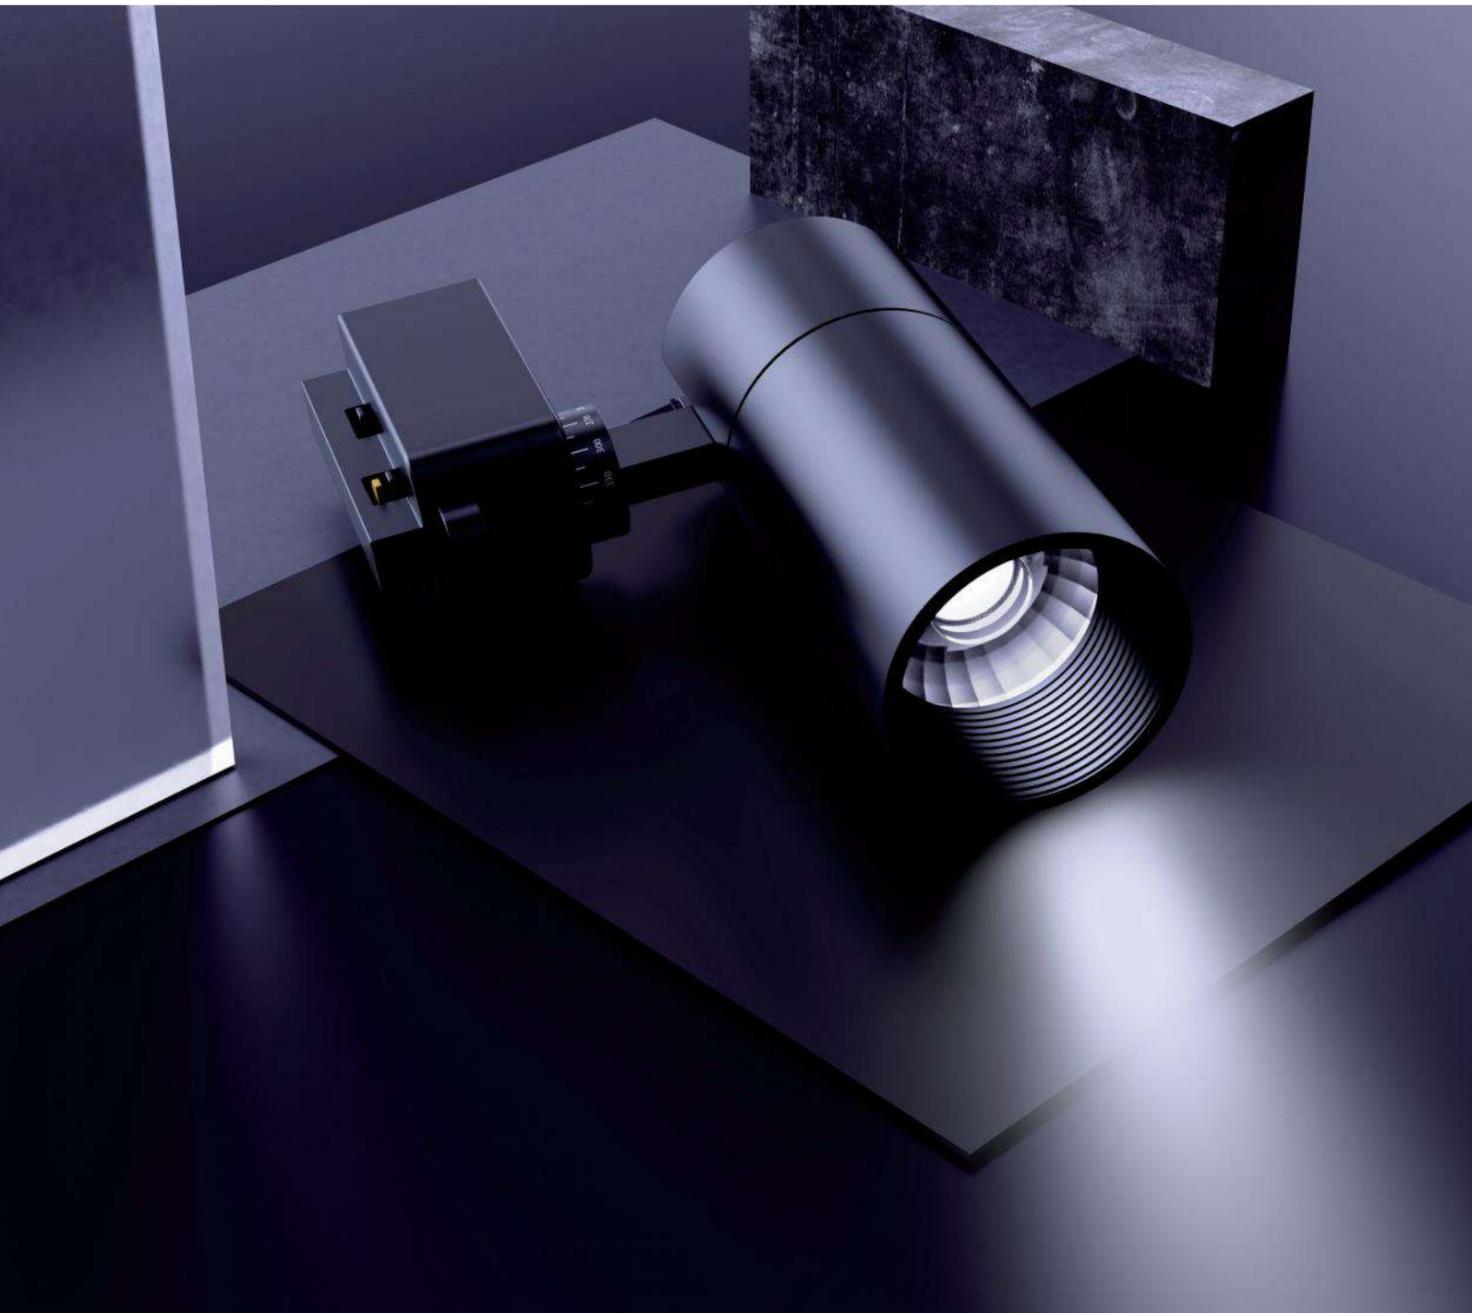





LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-20F01	● 20W	1950-2150LM	N	93X65X207mm
LPTRL-30F01	● 30W	3325-3675LM	N	94X75X207mm
LPTRL-20F02	● 20W	1950-2150LM	N	93X65X207mm
LPTRL-30F02	● 30W	3325-3675LM	N	94X75X207mm

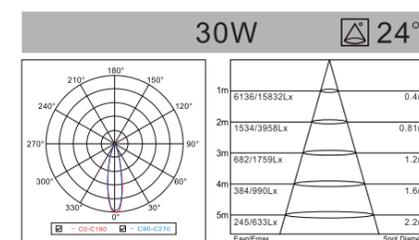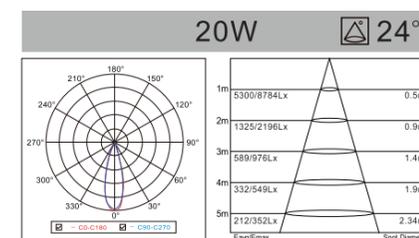

ALL IN ONE



2700K 4000K 6500K



Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable







LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-20FS01	● 20W	1600-1760 LM	N	93X65X207mm
LPTRL-30FS01	● 30W	2400-2640LM	N	94X75X207mm
LPTRL-20FS02	● 20W	1600-1760LM	N	93X65X207mm
LPTRL-30FS02	● 30W	2400-2640LM	N	94X75X207mm

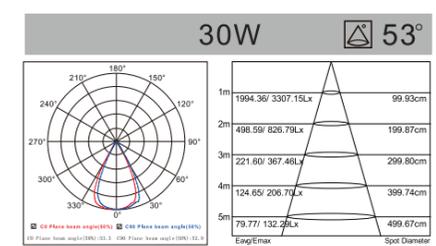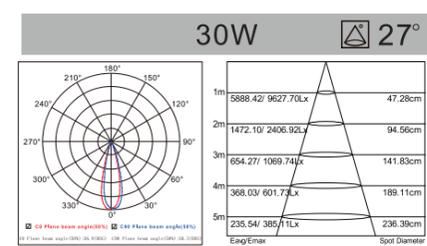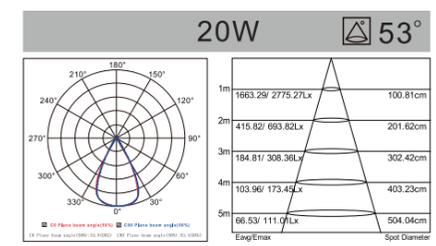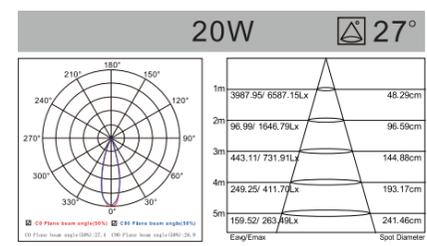

ALL IN ONE
2700K 4000K 6500K



Material
High Quality Aviation Aluminum

Color Temperature
 Warm White  Cool White  Natural White  CCT Adjustable 







LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-20FT01	● 20W	1600-1760 LM	N	93X65X207mm
LPTRL-30FT01	● 30W	2400-2640LM	N	94X75X207mm
LPTRL-20FT02	● 20W	1600-1760 LM	N	93X65X207mm
LPTRL-30FT02	● 30W	2400-2640LM	N	94X75X207mm

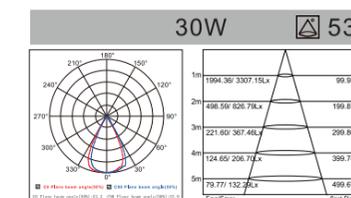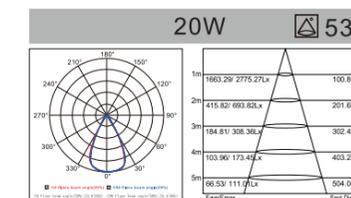

Available Accessories



Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable








LED LOUVER FITTING

AC:100/220-240V CRI≥80 H:30000h

50W 120°




40W 120°





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-LF60A60 40W	● 40W	3680-3960LM	N	600X7X600mm
LP-LF60A60 50W	● 50W	4780-4950LM	N	600X7X600mm

40W 115°



50W 115°

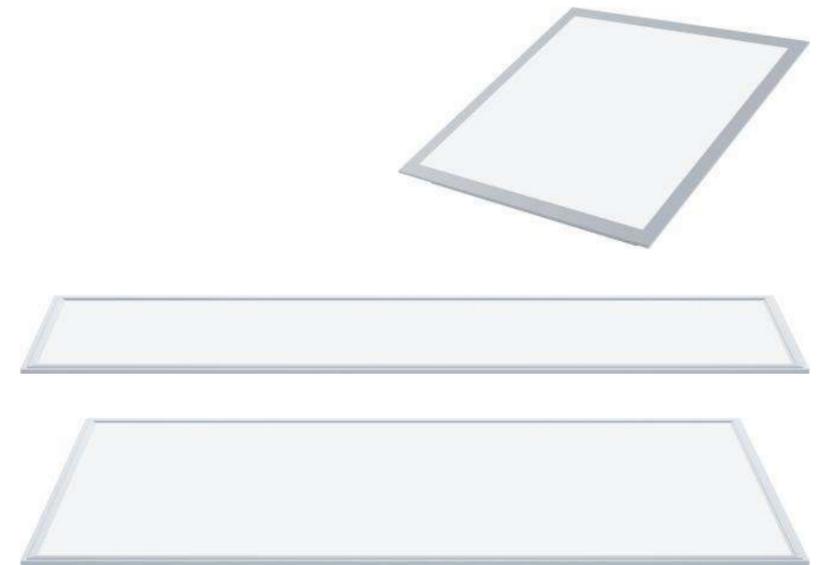

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPLF-60EF60 40W	● 40W	4200-4400LM	N	600X600X30mm
LPLF-60EF60 50W	● 50W	5250-5500LM	N	600X600X30mm
LPLF-120EF60 80W	● 80W	8400-8800LM	N	1200X600X30mm
LPLF-120EF30 40W	● 40W	4200-4400LM	N	1200X300X30mm

Color Temperature







LED TUBE

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-08D04	● 8W	600-680LM	N	600X30X37mm
LPTL-16D04	● 16W	1260-1350LM	N	1200X30X37mm
LPTL-16D04-2	● 16W	1260-1350LM	N	600X37X63mm
LPTL-32D04-2	● 32W	2550-2670LM	N	1200X37X63mm

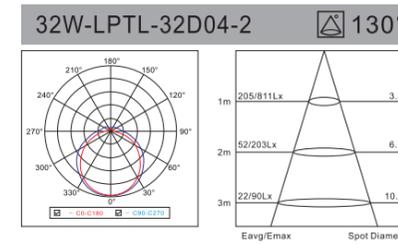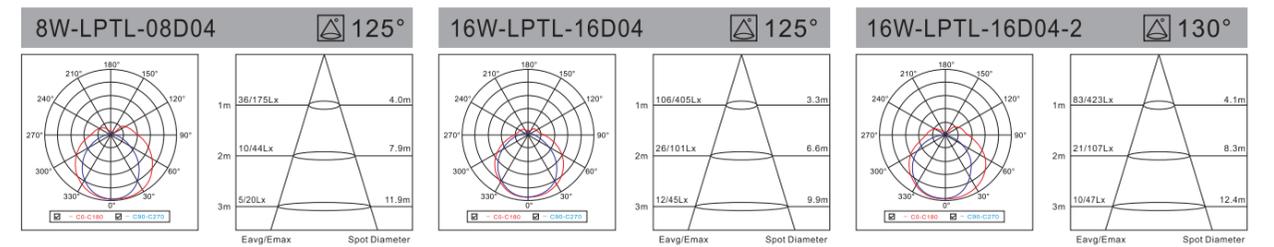

straight connection "I" shape connector Right angle connection "L" shape connector


Color Temperature









LED TUBE

AC:100/220-240V CRI≥80 H:30000h

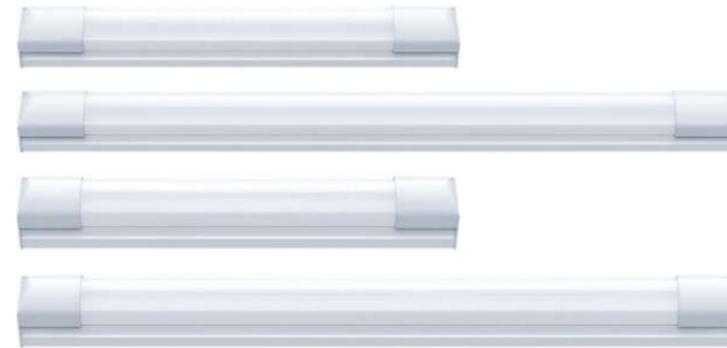

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-08DS04	8W	600-680LM	N	588X26X30mm
LPTL-16DS04	16W	1260-1350LM	N	1198X26X30mm
LPTL-18DS04-2	18W	1420-1530LM	N	588X36X56mm
LPTL-36DS04-2	36W	2880-2950LM	N	1198X36X56mm

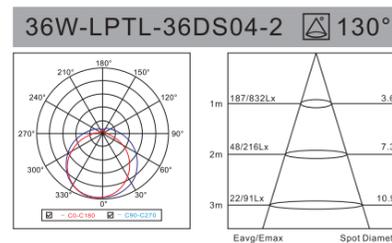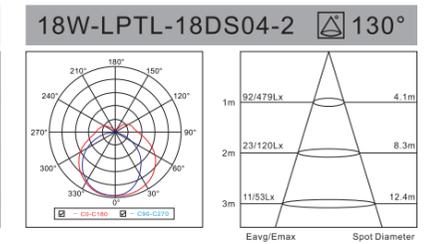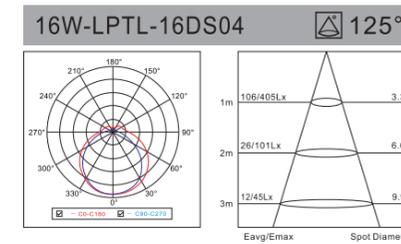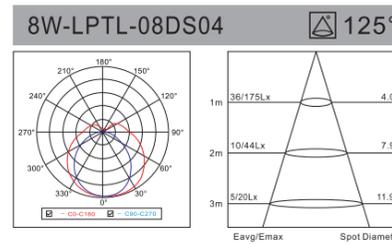


Color Temperature





Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL04D05	● 4W	360-410LM	N	300x23x35mm
LPTL08D05	● 8W	720-820LM	N	600x23x35mm
LPTL12D05	● 12W	1050-1200LM	N	900x23x35mm
LPTL16D05	● 16W	1400-1610LM	N	1200x23x35mm

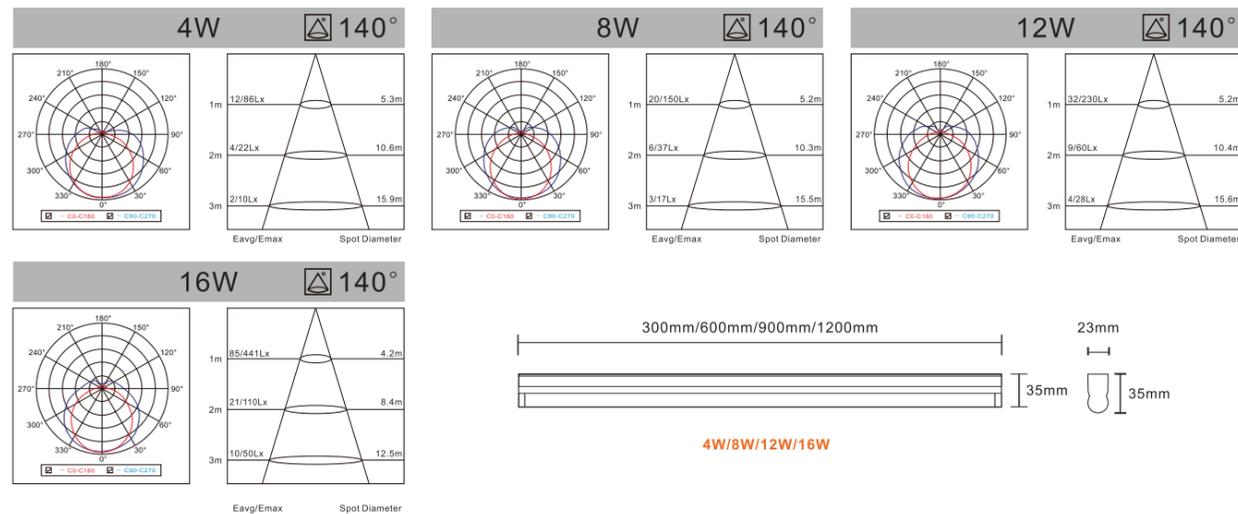


Color Temperature




LED TUBE

AC:100/220-240V CRI≥80 H:30000h

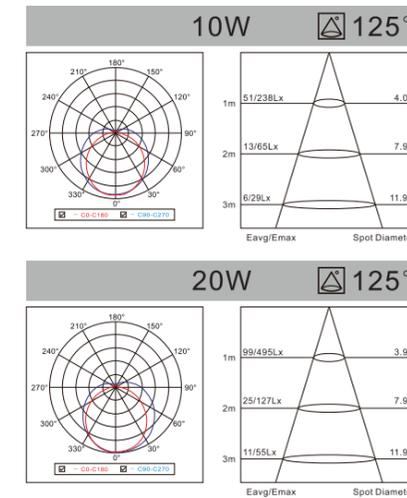


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL10C02	● 10W	800-900LM	N	∅ 26x600mm
LPTL20C02	● 20W	1600-1800LM	N	∅ 26x1200mm

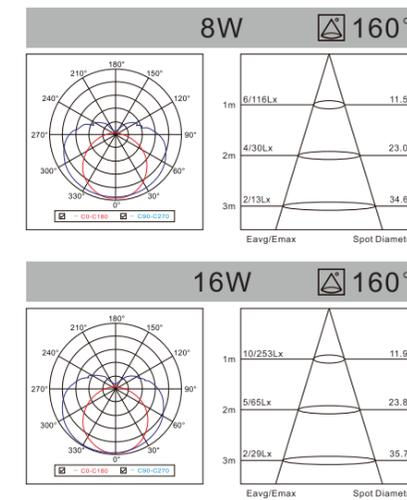


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL08E02	● 8W	720-880LM	N	∅ 26x600mm
LPTL16E02	● 16W	1440-1760LM	N	∅ 26x1200mm

Color Temperature




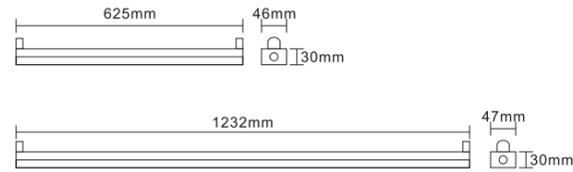

Modell Model	Produktgröße Product Size
CW.A 600mm Single Tube	625x46x30mm
CW.A 1200mm Single Tube	1232x47x30mm
CW.B 600mm Double Tube	625x46x30mm
CW.B 1200mm Double Tube	1232x47x30mm

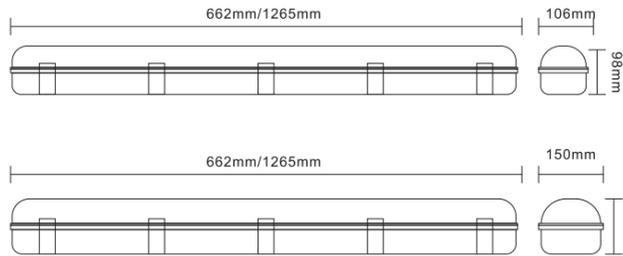

Modell Model	Produktgröße Product Size
SY6118-H 600mm Single Tube	662x98x106mm
SY6136-H 1200mm Single Tube	1265x98x106mm
SY6218-H 600mm Double Tube	662x106x150mm
SY6236-H 1200mm Double Tube	1265x106x150mm

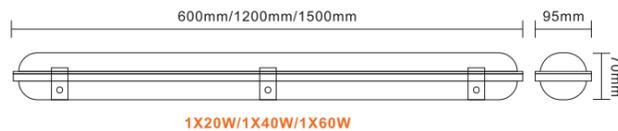


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
SY6120-H(LED)	1X20W	1650-1750LM	N	600X70X95mm
SY6140-H(LED)	1X40W	3350-3450LM	N	1200X70X95mm
SY6160-H(LED)	1X60W	5550-5650LM	N	1500X70X95mm

LED STRIPLIGHT

AC: 220-240V CRI ≥ 80 H:30000h

IP65 AC 220-240V

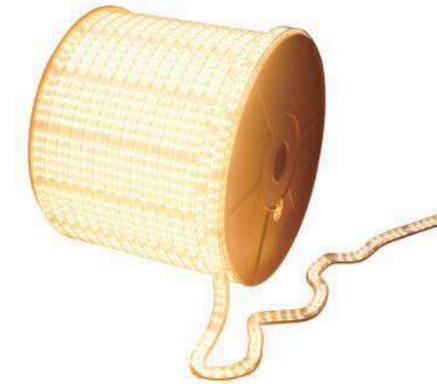

Power Supply
Carry 50M

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSL-7A01	7W/M	700LM/M	N	8mm
LPSL-12A01	12W/M	1200LM/M	N	11mm

IP20 DC24V



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-20A01	20W/M	2400LM/M	N	10mm
LPSTL-25A01	25W/M	3000LM/M	N	15mm
LPSTL-30A01	30W/M	3600LM/M	N	28mm/30mm
LPSTL-40A01	40W/M	4800LM/M	N	40mm

Color Temperature



LED STRIPLIGHT

AC: 220-240V CRI ≥ 80 H:30000h

IP20
DC24V
COB



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-11A01	● 11W/M	1100LM/M	N	8MM

IP68
DC24V



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-10A01	● 10W/M	1250LM/M	N	8MM

Color Temperature



LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-FG-10	● 10W	850-935LM	N	304X22X45mm
LP-CX-20CB-FG-20	● 20W	1700-1785LM	N	604X22X45mm
LP-CX-20CB-FG-30	● 30W	2550-2635LM	N	904X22X45mm

LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-DG2-10	● 10W	850-935LM	N	46X162mm
LP-CX-20CB-DG2-20	● 20W	1700-1785LM	N	56X196mm
LP-CX-20-HS-12	● 12W	1020-1080LM	N	40X300mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-GS-6	● 6W	510-595LM	N	134X22X45mm
LP-CX-20CB-GS-12	● 12W	1020-1105LM	N	220X22X46mm
LP-CX-20CB-GS-18	● 18W	1530-1615LM	N	328X22X47mm
LP-CX-20CB-GS-24	● 24W	2040-2125LM	N	435X22X47mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-GS-ZD-6	● 6W	510-595LM	N	134X22X85mm
LP-CX-20CB-GS-ZD-12	● 12W	1020-1105LM	N	220X22X85mm
LP-CX-20CB-GS-ZD-18	● 18W	1530-1615LM	N	328X22X85mm
LP-CX-20CB-GS-ZD-24	● 24W	2040-2125LM	N	435X22X85mm

Color Temperature



Color Temperature





4 installation methods
1/2/3meters

